


Lower Voltage Ceramic Disc Capacitors 2 kVDC to 7.5 kVDC

Fig. 1

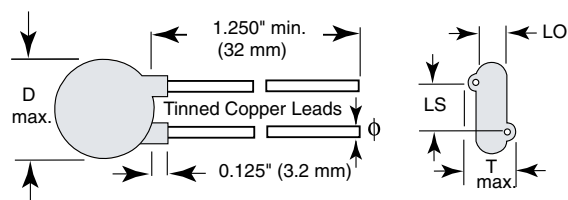

LEAD OFFSET 'LO'		
NOMINAL	~ THICKNESS - 0.100"	
EXCEPTION	0.07" (1.8 mm)	-565R20GAP10
	0.08" (2.0 mm)	-565R30GASS20
	0.10" (2.54 mm)	-565R30GASS33

INSULATION RESISTANCE

2 kVDC	min. 10 000 MΩ
3 kVDC	min. 50 000 MΩ
6 kVDC	min. 75 000 MΩ
7.5 kVDC	min. 200 000 MΩ

TOLERANCE ON CAPACITANCE

± 10 %, ± 20 %, - 20 % to + 80 %

DISSIPATION FACTOR

0.2 % max. at 1 MHz; 1 V
2.0 % max. at 1 kHz; 1 V

CATEGORY TEMPERATURE RANGE

- 25 °C to + 85 °C

CLIMATIC CATEGORY ACC. TO EN60068-1

25/085/21

OPERATING TEMPERATURE RANGE

- 25 °C to + 105 °C

FEATURES

- Low losses
- High capacitance in small sizes
- High stability
- Radial leads
- Compliant to RoHS directive 2002/95/EC



APPLICATIONS

- Lighting ballasts
- SMPS
- DC and pulse high voltage

DESIGN

The capacitors consist of a ceramic disc of which both sides are silver-plated. Connection leads are made of tinned copper having diameters of 0.025" (0.64 mm) or 0.032" (0.81 mm).

The capacitors may be supplied with radial kinked or straight leads having lead spacing of 0.250" (6.35 mm) or 0.375" (9.5 mm) or 0.500" (12.7 mm)

The standard tolerances are ± 10 % or ± 20 %.

Coating is made of resin coating or flame retardant epoxy resin in accordance with "UL 94 V-0".

CAPACITANCE RANGE

10 pF to 0.10 μF

RATED VOLTAGE

2 kVDC
3 kVDC
6 kVDC
7.5 kVDC

DIELECTRIC STRENGTH BETWEEN LEADS

Component test:

2 kVDC	3500 VDC, 2 s
3 kVDC	5000 VDC, 2 s
6 kVDC	10 500 VDC, 2 s
7.5 kVDC	11 250 VDC, 2 s

CERAMIC DIELECTRIC

C0G, U2J, R3L, (Class 1)
X7R, X5F, X5S, Y5S, Y5U, Y5V, Z5U (Class 2)

564R and 565R Series

Vishay Cera-Mite

Lower Voltage Ceramic Disc Capacitors
2 kVDC to 7.5 kVDC



ORDERING INFORMATION, CERAMIC 2 kVDC							
C (pF)	TOL. (%)	D DIAMETER INCH (mm)	T THICKNESS INCH (mm)	LS LEAD SPACE INCH (mm)	WIRE SIZE		ORDERING CODE
					AWG	INCH (mm)	
X7R							
100	± 10 %	0.330 (8.4)	0.190 (4.8)	0.250 (6.4)	20	0.032 (0.81)	564R20TST10
220			0.180 (4.6)				564R20TST22
330							564R20TST33
470			0.170 (4.3)				564R20TST47
560			0.185 (4.7)				564R20TST56
680			0.170 (4.3)				564R20TST68
1000		0.400 (10.2)	0.175 (4.4)				564R20TSD10
1500		0.430 (10.9)	0.160 (4.1)				564R20TSD15
1800		0.460 (11.7)	0.170 (4.3)				564R20TSD18
2200							564R20TSD22
2700							564R20TSD27
3300		0.530 (13.5)	0.160 (4.1)				564R20TSD33
3900		0.680 (17.3)	0.170 (4.3)				564R20TSD39
4700				564R20TSD47			
Y5S							
1000	± 20 %	0.330 (8.4)	0.175 (4.4)	0.250 (6.4)	20	0.032 (0.81)	564R20TSSD10
1500		0.400 (10.2)	0.170 (4.3)				564R20TSSD15
1800		0.430 (10.9)					564R20TSSD18
2200		0.460 (11.7)					564R20TSSD22
2700		0.530 (13.5)	0.175 (4.4)				564R20TSSD27
3300		0.620 (15.7)					564R20TSSD33
3900		0.680 (17.3)		564R20TSSD39			
4700		0.170 (4.3)		564R20TSSD47			
5600			564R20TSSD56				
6800			564R20TSSD68				
Y5U							
1000	± 20 %	0.330 (8.4)	0.170 (4.3)	0.250 (6.4)	20	0.032 (0.81)	564R20GAD10
1500		0.330 (8.4)	0.170 (4.3)				564R20GAD15
Z5U							
1800	± 20 %	0.360 (9.1)	0.170 (4.3)	0.250 (6.4)	20	0.032 (0.81)	564R20GAD18
2200		0.400 (10.2)	0.175 (4.4)				564R20GAD22
2700		0.430 (10.9)					564R20GAD27
3300		0.490 (12.4)					564R20GAD33
3900			564R20GAD39				
4700			564R20GAD47				
6800		0.560 (14.2)	0.170 (4.3)	564R20GAD68			
0.010 μF		0.680 (17.3)		564R20GAS10			
Y5V							
0.010 μF	± 20 %	0.620 (15.7)	0.170 (4.3)	0.375 (9.5)	20	0.032 (0.81)	564R20GASS10
0.10 μF		0.950 (24.1)	0.240 (6.1)		22	0.025 (0.64)	565R20GAP10

TAPE AND REEL OPTIONS

- To specify tape and reel, add two letter suffix to the ordering code (for details of the packaging code see general section of the catalog)



564R and 565R Series

Lower Voltage Ceramic Disc Capacitors
2 kVDC to 7.5 kVDC

Vishay Cera-Mite

ORDERING INFORMATION, CERAMIC 3 kVDC									
C (pF)	TOL. (%)	D DIAMETER INCH (mm)	T THICKNESS INCH (mm)	LS LEAD SPACE INCH (mm)	WIRE SIZE		ORDERING CODE		
U2J (N750)									
10	± 20 %	0.330 (8.4)	0.210 (5.3)	0.250 (6.4)	20	0.032 (0.81)	564R30GAQ10		
12			0.210 (5.3)				564R30GAQ12		
15			0.180 (4.6)				564R30GAQ15		
R3L (N2200)									
22	± 20 %	0.330 (8.4)	0.200 (5.1)	0.250 (6.4)	20	0.032 (0.81)	564R30GAQ22		
27			0.190 (4.8)				564R30GAQ27		
33			0.170 (4.3)				564R30GAQ33		
X7R									
47	± 20 %	0.330 (8.4)	0.230 (5.8)	0.250 (6.4)	20	0.032 (0.81)	564R30GAQ47		
56			0.190 (4.8)				564R30GAQ56		
68			0.200 (5.1)				564R30GAQ68		
100			0.180 (4.6)				564R30GAT10		
150			0.190 (4.8)				564R30GAT15		
220			0.175 (4.4)				564R30GAT22		
270			0.180 (4.6)				564R30GAT27		
330			0.175 (4.4)				564R30GAT33		
390							564R30GAT39		
470			0.180 (4.6)				564R30GAT47		
680	± 10 %	0.400 (10.2)	0.180 (4.6)	0.375 (9.5)	20	0.032 (0.81)	564R30TST68		
1000			0.175 (4.4)				564R30TSD10		
1500		0.490 (12.5)	564R30TSD15						
1800		0.530 (13.5)	564R30TSD18						
2200			564R30TSD22						
2700		0.620 (15.7)	564R30TSD27						
3300			564R30TSD33						
3900		0.720 (18.3)	564R30TSD39						
4700			564R30TSD47						
6800		0.900 (22.9)	564R30TSD68						
6800		0.185 (4.7)							
Y5S									
1000	± 20 %	0.400 (10.2)	0.190 (4.8)	0.250 (6.4)	20	0.032 (0.81)	564R30TSSD10		
1500		0.460 (11.7)					564R30TSSD15		
1800		0.490 (12.4)					564R30TSSD18		
2200		0.530 (13.5)					564R30TSSD22		
2700		0.560 (14.2)	0.185 (4.7)	0.375 (9.5)			564R30TSSD27		
3300		0.620 (15.7)					564R30TSSD33		
3900		0.680 (17.3)					564R30TSSD39		
4700		0.790 (20.0)					564R30TSSD47		
5600		0.900 (22.9)	564R30TSSD56						
6800		0.205 (5.2)	564R30TSSD68						
Y5U									
680	± 20 %	0.330 (8.4)	0.175 (4.4)	0.250 (6.4)	20	0.032 (0.81)	564R30GAT68		
Z5U									
1000	± 20 %	0.330 (8.4)	0.195 (5.0)	0.250 (6.4)	20	0.032 (0.81)	564R30GAD10		
1500		0.360 (9.1)	0.190 (4.8)				564R30GAD15		
1800		0.400 (10.2)					564R30GAD18		
2200		0.430 (10.9)					564R30GAD22		
2700		0.460 (11.7)	0.200 (5.1)	564R30GAD27					
3300		0.490 (12.4)	0.185 (4.7)	564R30GAD33					
3900		0.530 (13.5)		564R30GAD39					
4700		0.620 (15.7)	0.195 (5.0)	564R30GAD47					
6800		0.680 (17.3)	0.375 (9.5)				564R30GAD68		
8200							564R30GAD82		
0.010 µF		0.790 (20.0)					564R30GAS10		
0.020 µF		0.720 (18.3)	0.240 (6.1)	22			0.025 (0.64)	565R30GASS20	
0.033 µF		0.900 (22.9)		22			0.025 (0.64)	565R30GASS33	
Y5V									
0.010 µF	± 20 %	0.720 (18.3)	0.185 (4.7)	0.375 (9.5)	20	0.032 (0.81)	564R30GASS10		

TAPE AND REEL OPTIONS

• To specify tape and reel, add two letter suffix to the ordering code (for details of the packaging code see general section of the catalog)



564R and 565R Series

Lower Voltage Ceramic Disc Capacitors
2 kVDC to 7.5 kVDC

Vishay Cera-Mite

ORDERING INFORMATION, CERAMIC 6 kVDC

C (pF)	TOL. (%)	D DIAMETER INCH (mm)	T THICKNESS INCH (mm)	LS LEAD SPACE INCH (mm)	WIRE SIZE		ORDERING CODE
AWG							
INCH (mm)							
C0G (NP0)							
10	± 20 %	0.400 (10.2)	0.220 (5.6)	0.375 (9.5)	20	0.032 (0.81)	564R60GAQ10
U2J (N750)							
22	± 20 %	0.460 (11.7)	0.240 (6.1)	0.375 (9.5)	20	0.032 (0.81)	564R60GAQ22
R3L (N2200)							
33	± 20 %	0.400 (10.2)	0.230 (5.8)	0.375 (9.5)	20	0.032 (0.81)	564R60GAQ33
47		0.460 (11.7)	0.205 (5.2)				564R60GAQ47
X5F							
100	± 20 %	0.400 (10.2)	0.240 (6.1)	0.375 (9.5)	20	0.032 (0.81)	564R60GAT10
220			0.265 (6.7)				564R60GAT22
X5S							
330	± 20 %	0.400 (10.2)	0.260 (6.6)	0.375 (9.5)	20	0.032 (0.81)	564R60GAT33
Y5U							
470	± 20 %	0.400 (10.2)	0.265 (6.7)	0.375 (9.5)	20	0.032 (0.81)	564R60GAT47
560			0.240 (6.1)				564R60GAT56
Z5U							
1000	± 20 %	0.400 (10.2)	0.270 (6.9)	0.375 (9.5)	20	0.032 (0.81)	564R60GAD10
1500		0.460 (11.7)	0.280 (7.1)				564R60GAD15
2200		0.530 (13.5)	0.240 (6.1)				564R60GAD22
3300		0.620 (15.7)	0.260 (6.6)				564R60GAD33
4700		0.790 (20.0)					564R60GAD47
0.010 µF		0.950 (24.1)	0.250 (6.4)				564R60GAS10

ORDERING INFORMATION, CERAMIC 7.5 kVDC

C (pF)	TOL. (%)	D DIAMETER INCH (mm)	T THICKNESS INCH (mm)	LS LEAD SPACE INCH (mm)	WIRE SIZE		ORDERING CODE
					AWG	INCH (mm)	
X5F							
100	± 20 %	0.530 (13.5)	0.310 (7.9)	0.500 (12.7)	20	0.032 (0.81)	564R75GAT10
470		0.620 (15.7)	0.270 (6.9)				564R75GAT47
Y5U							
1000	+ 80/- 20 %	0.620 (15.7)	0.320 (8.1)	0.500 (12.7)	20	0.032 (0.81)	564R75GAD10
Z5U							
2500	+ 80/- 20 %	0.620 (15.7)	0.280 (7.1)	0.500 (12.7)	20	0.032 (0.81)	564R75GAD25



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.