


ORDERING INFORMATION

1. Series:	SET	3A
SEF = Fast Acting		
SET = Time Delay		
2. Ampere Rating:		
SEF = .062 to 15A		
SET = .200 to 7A		




SURFACE MOUNT MICRO FUSES

SEF *Style: Quick Acting
 *Size: 2.6 X 6.2mm
 *Ampere Rating: .062 – 15A
 *Voltage Rating: 125V AC/DC

SET *Style: Time Delay
 *Size: 2.6 X 6.2mm
 *Ampere Rating: .200 – 7A
 *Voltage Rating: 125V AC/DC

SEF Rated Current	1In		2In	
	MIN	MAX	MIN	MAX
62mA – 10A	4 hrs		5 sec	
12A – 15A	4 hrs		60 sec	

SET Rated Current	1In		2In		3In		8In	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
200mA – 7A	4 hrs		1 sec	60 sec	0.2 sec	3 sec	0.02 sec	0.1 sec

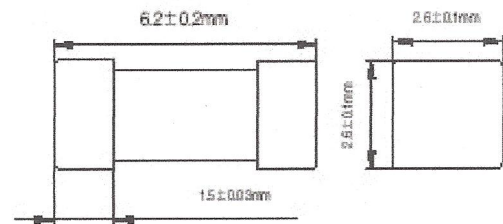

SEF

SET

Current Rating (A)	Voltage Rating (V)	Average Cold Resistance (Ω)	Average Voltage Drop (mV)
0.62	125	6.6840	1000
0.80	125	4.0000	900
0.100	125	2.5000	900
0.125	125	1.8390	800
0.200	125	0.4200	600
0.250	125	0.3850	500
0.300	125	0.3300	450
0.375	125	0.2510	400
0.400	125	0.2250	350
0.500	125	0.1630	300
0.700	125	0.1300	280
0.750	125	0.1020	270
1	125	0.0730	250
1.50	125	0.0430	220
2	125	0.0310	200
2.50	125	0.0240	180
3	125	0.0210	160
3.50	125	0.0180	150
4	125	0.0160	150
5	125	0.0130	130
6	125	0.0110	120
7	125	0.0082	120
8	125	0.0058	110
10	125	0.0049	90
12	65	0.0031	80
15	65	0.0020	70

Current Rating (A)	Voltage Rating (V)	Average Cold Resistance (Ω)	Average Voltage Drop (mV)
0.200	125	2.5010	750
0.250	125	1.5640	700
0.300	125	1.3520	600
0.350	125	0.9770	550
0.375	125	0.6830	500
0.400	125	0.5500	450
0.450	125	0.4950	450
0.500	125	0.4510	400
0.700	125	0.2420	360
0.750	125	0.2100	320
1	125	0.1320	250
1.5	125	0.0670	230
2	125	0.0430	210
2.5	125	0.0400	200
3	125	0.0330	190
3.5	125	0.0240	180
4	125	0.0220	160
5	125	0.0210	150
6	125	0.0180	140
7	125	0.0110	130