

ERS

Endurance 3.000h at 105°C
 Rated voltage range: 10V to 100V, Rated capacitance range: 3,3µF to 1000µF
 Size range: 8,9 x 12,0mm and 10,2 x 12,0mm
 Designed as G-Kap (C_R measured at DC-Load) or bipolar Chip capacitor available
 RoHS compliant
 Special types on request



Specifications

	Characteristics									
Temperature range	-55°C to +105°C									
Rated voltage range	10V to 100V									
Capacitance tolerance	±20%, other on request (at 20°C, 100Hz)									
Leakage current I_{ra}	$I_{ra}=0,002 \cdot C_R \cdot V_R + 3\mu A$ or 5µA, whichever is greater (I_{ra} [µA], C_R : Rated capacitance [µF], V_R : Rated voltage [V]) (at 20°C, after 5 minutes)									
Dissipation factor (tan δ)	Rated voltage (V_R)	10V	16V	25V	35V	40V	50V	63V	100V	(at 20°C, 100Hz)
	$\tan \delta_{max}$	0,19	0,16	0,14	0,12	0,11	0,10	0,09	0,08	
Low temperature characteristics	Rated voltage (V_R)	10V	16V	25V	35V	40V	50V	63V	100V	(100Hz)
	$Z(-40^\circ C)/(20^\circ C)$	2	2	2	2	2	2	2	2	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 3.000 hours at 105°C.									
	Capacitance change	$\Delta C/C_0 \leq \pm 25\%$								
	D.F. (tan δ)	$\Delta \tan \delta \leq +200\%$ of the initial specification value								
	Leakage current (I_{ra})	$I_{ra} \leq$ the initial specified value								
Shelf life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1.000 hours at 105°C without voltage applied.									
	Capacitance change	$\Delta C/C_0 \leq \pm 25\%$								
	D.F. (tan δ)	$\Delta \tan \delta \leq +200\%$ of the initial specification value								
	Leakage current (I_{ra})	$I_{ra} \leq +200\%$ of the initial specification value								
Surge voltage test	The capacitors shall be subjected to 1.000 cycles each consisting of charging with the specified surge voltage for 30±5 seconds through a protective resistor ($R=0,1/C_R$) and open-circuiting for 330 seconds at 105°C. The following specifications shall be satisfied when the capacitors are restored to 20°C.									
	Rated voltage (V_R)	10V	16V	25V	35V	40V	50V	63V	100V	
	Surge voltage (V_S)	11,5V	18,4V	28,8V	40,3V	46V	57,5V	72,5V	115V	
	Appearance	No significant damage								
	Capacitance change	$\Delta C/C_0 \leq \pm 10\%$								
	D.F. (tan δ)	$\tan \delta \leq$ the initial specified value								
	Leakage current (I_{ra})	$I_{ra} \leq$ the initial specified value								

FROLYT Kondensatoren und Bauelemente GmbH

ISO 9001 VDA 6.1

Tel.: +49 3731 571-300

Fax: +49 3731 571-317

e-mail: info@frolyt.de

Website: www.frolyt.de

Home adress: Dammstraße 46

D-09599 Freiberg/Saxony

Aluminium-electrolytic capacitors SMD (Chip) for surface mounting in the general industrial electronics and special electronics for example automobile industry. Insulated, polarized, pulse proof
Endurance at least 3.000h at +105°C

ERS

Generic specification:
DIN EN 60384-1

Sectional specification:
DIN EN 60384-18
without quality assessment

Operating temperature range:
- 55°C to +105°C



Climatic category:
55/105/56

Capacitance range:
±20% (other on request)

Surge voltage V_S :
 $V_S = 1,15 \cdot V_R$

Leakage current I_{ra} :
measured at V_R at +20°C
 $I_{ra} \leq 0,002 \cdot C_R \cdot V_R + 3\mu A$ or 5μA
(after 5 minutes, whichever is greater)
 C_R : Rated capacitance (μF)
 V_R : Rated voltage (V)

Reverse voltage:
at +20°C to +25°C = 2V (briefly)
at -55°C to +105°C = 1V (briefly)

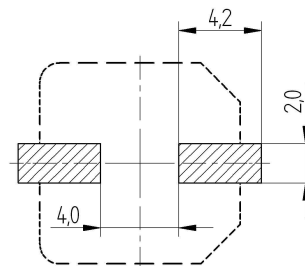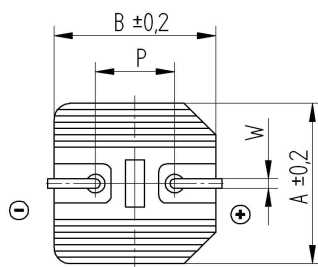


*Soldering on PC board



The marking is done by printing on the case surface (Ink-Jet)

*Recommended Soldering area on PC board

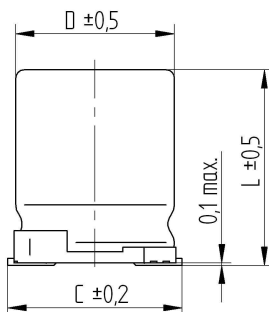

Dimensions (mm)		
	Terminal length x Height	
	8,9 x 12,0	10,2 x 12,0
A	8,9	10,2
B	8,9	10,2
C	9,7	11,0
D	8,7	10,0
L	12,0	12,0
W	0,8-1,1	0,8-1,1
P	4,5	4,5
Endurance at least (after soldering)		
Ambient temperature		
	≤ +40°C	288.000h
	+85°C	12.000h
	+105°C	3.000h

Dimensions Overview: Terminal length x Height (mm)								
Rated cap. C_R [μF]	Rated voltage V_R [V]							
	10	16	25	35	40	50	63	100
3,3								8,9 x 12,0
4,7							8,9 x 12,0	8,9 x 12,0
6,8						8,9 x 12,0	8,9 x 12,0	8,9 x 12,0
10					8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0
15				8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0
22			8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0
33		8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	10,2 x 12,0
47	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	10,2 x 12,0
68	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	10,2 x 12,0	
100	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	10,2 x 12,0	
150	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	10,2 x 12,0	10,2 x 12,0	10,2 x 12,0	
220	8,9 x 12,0	8,9 x 12,0	8,9 x 12,0	10,2 x 12,0	10,2 x 12,0	10,2 x 12,0		
330	8,9 x 12,0	10,2 x 12,0	10,2 x 12,0	10,2 x 12,0				
470	8,9 x 12,0	10,2 x 12,0	10,2 x 12,0					
680	8,9 x 12,0	10,2 x 12,0						
1 000	10,2 x 12,0							

Technical specifications

Rated cap. C _R [μF]	Rated voltage V _R [V]	Size [mm] Terminal length x Height	tan δ 100Hz +20°C (max)	ESR [Ω] 100Hz +20°C (max)	Z [Ω] 10kHz +20°C (max)	Z [Ω] 10kHz -40°C (max)	I~ [mA]* 100kHz +105°C (max)	Ordering information for FROLYT SMD/Chip electrolytic capacitors
47	10	8,9 x 12,0	0,19	6,43	1,35	14,90	150	<ul style="list-style-type: none"> • Series • Rated capacitance/ Rated voltage • Capacitance tolerance • Dimensions (Terminal length x Height) • Additional requirements
68	10	8,9 x 12,0	0,19	4,45	0,90	9,90	183	
100	10	8,9 x 12,0	0,19	3,02	0,53	5,80	225	
150	10	8,9 x 12,0	0,19	2,02	0,53	5,80	273	
220	10	8,9 x 12,0	0,19	1,37	0,53	5,80	330	
330	10	8,9 x 12,0	0,19	0,92	0,53	5,80	400	
470	10	8,9 x 12,0	0,19	0,64	0,53	5,80	480	
680	10	8,9 x 12,0	0,19	0,44	0,47	5,20	533	
1 000	10	10,2 x 12,0	0,19	0,30	0,43	4,50	601	
33	16	8,9 x 12,0	0,16	7,72	1,38	15,20	150	
47	16	8,9 x 12,0	0,16	5,42	1,05	11,60	170	
68	16	8,9 x 12,0	0,16	3,74	0,80	8,80	230	
100	16	8,9 x 12,0	0,16	2,55	0,53	5,80	260	
150	16	8,9 x 12,0	0,16	1,70	0,53	5,80	300	
220	16	8,9 x 12,0	0,16	1,16	0,53	5,80	370	
330	16	10,2 x 12,0	0,16	0,77	0,42	4,40	470	
470	16	10,2 x 12,0	0,16	0,54	0,42	4,40	560	
680	16	10,2 x 12,0	0,16	0,37	0,39	4,30	620	
22	25	8,9 x 12,0	0,14	10,13	1,30	14,30	150	
33	25	8,9 x 12,0	0,14	6,75	1,10	12,10	170	
47	25	8,9 x 12,0	0,14	4,74	0,90	9,90	210	
68	25	8,9 x 12,0	0,14	3,28	0,70	7,70	240	
100	25	8,9 x 12,0	0,14	2,23	0,53	5,80	280	
150	25	8,9 x 12,0	0,14	1,49	0,53	5,80	350	
220	25	8,9 x 12,0	0,14	1,01	0,53	5,80	400	
330	25	10,2 x 12,0	0,14	0,68	0,42	4,40	510	
470	25	10,2 x 12,0	0,14	0,47	0,39	4,30	600	
15	35	8,9 x 12,0	0,12	12,73	1,36	15,00	150	
22	35	8,9 x 12,0	0,12	8,68	1,15	12,70	170	
33	35	8,9 x 12,0	0,12	5,79	1,05	11,60	195	
47	35	8,9 x 12,0	0,12	4,06	0,80	8,80	215	
68	35	8,9 x 12,0	0,12	2,81	0,65	7,20	285	
100	35	8,9 x 12,0	0,12	1,91	0,60	6,60	300	
150	35	8,9 x 12,0	0,12	1,27	0,50	5,50	365	
220	35	10,2 x 12,0	0,12	0,87	0,42	4,40	450	
330	35	10,2 x 12,0	0,12	0,58	0,36	4,00	540	
10	40	8,9 x 12,0	0,11	17,51	1,94	21,34	150	
15	40	8,9 x 12,0	0,11	11,67	1,49	16,39	170	
22	40	8,9 x 12,0	0,11	7,96	1,05	11,55	190	
33	40	8,9 x 12,0	0,11	5,31	0,83	9,13	205	
47	40	8,9 x 12,0	0,11	3,72	0,60	6,60	220	
68	40	8,9 x 12,0	0,11	2,57	0,60	6,60	290	
100	40	8,9 x 12,0	0,11	1,75	0,60	6,60	300	
150	40	10,2 x 12,0	0,11	1,17	0,46	5,06	380	
220	40	10,2 x 12,0	0,11	0,80	0,31	3,41	460	
6,8	50	8,9 x 12,0	0,10	23,41	2,05	22,55	150	
10	50	8,9 x 12,0	0,10	15,92	1,81	19,91	170	
15	50	8,9 x 12,0	0,10	10,61	1,26	13,86	180	
22	50	8,9 x 12,0	0,10	7,23	0,94	10,34	200	
33	50	8,9 x 12,0	0,10	4,82	0,92	10,12	215	
47	50	8,9 x 12,0	0,10	3,39	0,90	9,90	230	
68	50	8,9 x 12,0	0,10	2,34	0,85	9,35	315	
100	50	8,9 x 12,0	0,10	1,59	0,80	9,90	350	
150	50	10,2 x 12,0	0,10	1,06	0,42	4,62	450	
220	50	10,2 x 12,0	0,10	0,72	0,29	3,19	525	

Ordering example: ERS 470μF 16V ±20%, 10,2 x 12,0mm, Carrier Tape on reel


* I~ (Rated ripple current) refers to an increase in temperature of 3K, special requirements or special types on request

Technical specifications

Rated cap. C_R [μ F]	Rated voltage V_R [V]	Size [mm]		$\tan \delta$ 100Hz +20°C (max)	ESR [Ω] 100Hz +20°C (max)	Z [Ω] 10kHz +20°C (max)	Z [Ω] 10kHz -40°C (max)	I~ [mA]* 100kHz +105°C (max)	Ordering information for FROLYT SMD/Chip electrolytic capacitors
		Terminal length	Height						
4,7	63	8,9 x 12,0		0,09	30,48	4,50	50,40	150	Series • Rated capacitance/ Rated voltage • Capacitance tolerance • Dimensions (Terminal length x Height) • Additional requirements Ordering example: ERS 470 μ F 16V \pm 20%, 10,2 x 12,0mm, Carrier Tape on reel
6,8	63	8,9 x 12,0		0,09	21,06	3,50	39,20	170	
10	63	8,9 x 12,0		0,09	14,32	2,50	28,00	180	
15	63	8,9 x 12,0		0,09	9,55	1,20	13,20	185	
22	63	8,9 x 12,0		0,09	6,51	1,10	12,00	205	
33	63	8,9 x 12,0		0,09	4,34	1,00	11,00	220	
47	63	8,9 x 12,0		0,09	3,05	0,90	10,00	290	
68	63	10,2 x 12,0		0,09	2,11	0,85	9,35	340	
100	63	10,2 x 12,0		0,09	1,43	0,80	8,80	370	
150	63	10,2 x 12,0		0,09	0,95	0,42	4,62	500	
3,3	100	8,9 x 12,0		0,08	38,58	9,00	297,00	150	
4,7	100	8,9 x 12,0		0,08	27,09	7,50	247,50	170	
6,8	100	8,9 x 12,0		0,08	18,72	5,00	165,00	175	
10	100	8,9 x 12,0		0,08	12,73	3,00	99,00	185	
15	100	8,9 x 12,0		0,08	8,49	2,50	82,50	190	
22	100	8,9 x 12,0		0,08	5,79	1,50	49,50	210	
33	100	10,2 x 12,0		0,08	3,86	1,20	39,50	230	
47	100	10,2 x 12,0		0,08	2,71	1,00	33,00	300	

* I~ (Rated ripple current) refers to an increase in temperature of 3K, special requirements or special types on request

- Packaging:
- Blister tapes on reel
 - 300 components/ reel (one packaging unit)
 - 2700 Chips = 9 reels (minimum order quantity)

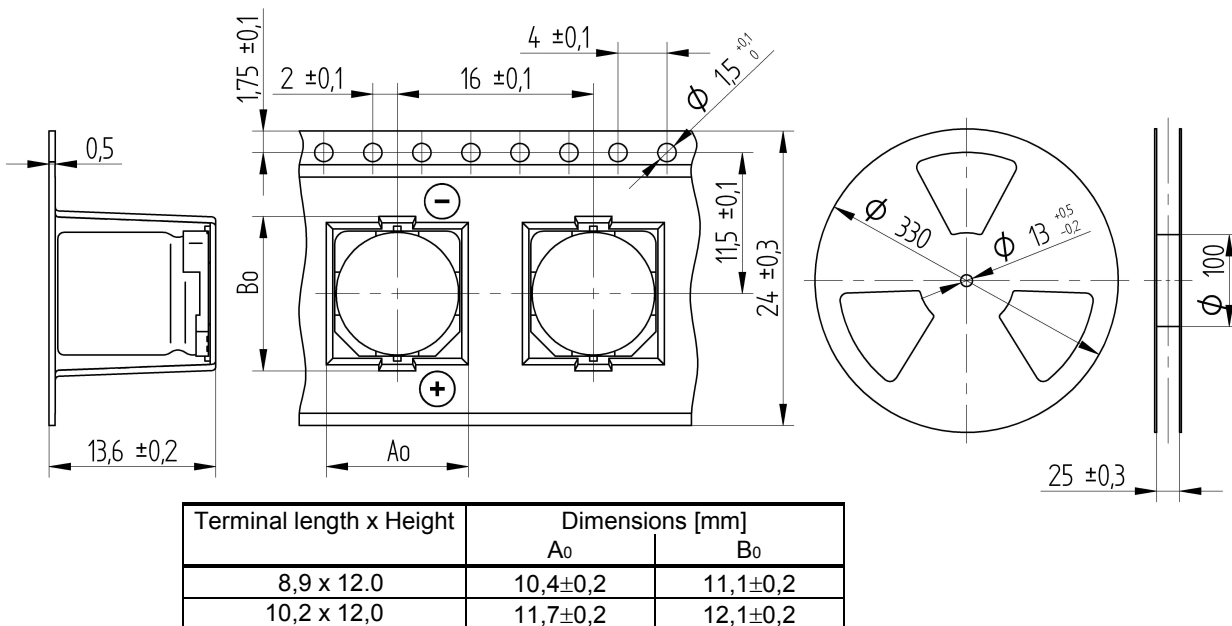

Soldering:

Recommended soldering conditions: https://www.frolyt.de/wp-content/uploads/Soldering_profils.pdf.

FROLYT-SMD-capacitors the size 10,2 x 12,0 are also suitable für vapor phase soldering.

All information provided in printed form needs for her legal obligation for the purposes of §§463 and 480 II Civil Code of the explicit written confirmation. Hence, the given data imply exclusively a product description and are not to be understood as assured qualities.