

DWG. NO. CR2736-OS SHT REV

THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY.

	REVISIONS						
REV.	DESCRIPTION	ECO	DATE	APPROVED			
1	INITIAL RELEASE	I.R.	10/26/15	P.T			



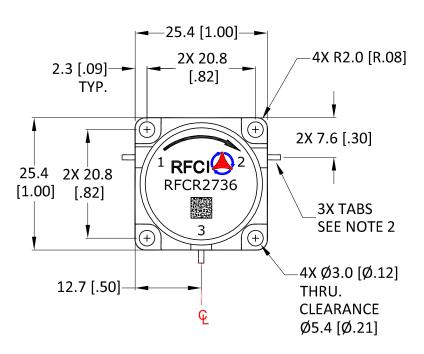

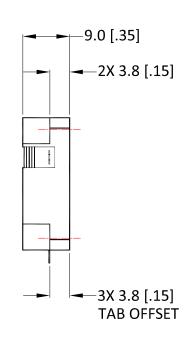

Specifications

Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	2000		2620
Insertion Loss (dB) From 2000 to 2300MHz From 2580 to 2620MHz		< .30 < .35	.40 .50
Isolation (dB) From 2000 to 2300MHz From 2580 to 2620MHz	16 16	>20 >18	
Return Loss (dB) From 2000 to 2300MHz From 2580 to 2620MHz	16 16	>20 >18	

Power & Temperature Ratings

Parameter	Maximum		
Forward PWR Peak/AVG	1000/200 Watts		
Reverse Power CW	200 Watts		
Operating Temperature	-40 to +85° C		
Storage Temperature	-40 to +95° C		

Notes:

- 1. Typical Values Represent Performance @ +23 °C.
- 2. Tab Dimensions: $1.00 [.040]W \times 3.0[.12]L \times 0.20[.008]T$
- S-Parameters to be measured by connecting Port 1 and 2 to VNA, and Port 3 to Load with return loss 30dB or higher

CW CIRCULATOR MODEL: RFCR2736

