


All resistors are rated ½ watt
 Maximum peak surge voltage is 1 ½ times the
 rated DC voltage.
 For other lead lengths and resistor values,
 consult factory.
 Temperature range: -40° C to +85° C



CAPACITY MFD.	RESISTANCE OHMS 10%	RATED VOLTAGE	PEAK PULSE VOLTAGE	L mm	H mm	T mm	LS mm	Ld 1 / Ld 2 mm	PART NUMBER
1.0 ± 20%	22	↑ 200 VDC 125 VAC ↓	300V	36.8	17.0	10.0	30 ± 2	0.8 / 0.7	RG2675-1
1.0 ± 20%	33		300V	36.8	17.0	10.0	30 ± 2	0.8 / 0.7	RG2675-2
1.0 ± 20%	47		300V	36.8	17.0	10.0	30 ± 2	0.8 / 0.7	RG2675-3
1.0 ± 20%	68		300V	36.8	17.0	10.0	30 ± 2	0.8 / 0.7	RG2675-4
1.0 ± 20%	82		300V	36.8	17.0	10.0	30 ± 2	0.8 / 0.7	RG2675-5
1.0 ± 20%	100		300V	36.8	17.0	10.0	30 ± 2	0.8 / 0.7	RG2675-6
1.0 ± 20%	150		300V	36.8	17.0	10.0	30 ± 2	0.8 / 0.7	RG2675-7
1.0 ± 20%	220		300V	36.8	17.0	10.0	30 ± 2	0.8 / 0.7	RG2675-8
1.0 ± 20%	330		300V	36.8	17.0	10.0	30 ± 2	0.8 / 0.7	RG2675-9
1.0 ± 20%	470		300V	36.8	17.0	10.0	30 ± 2	0.8 / 0.7	RG2675-10
1.0 ± 20%	680		300V	36.8	17.0	10.0	30 ± 2	0.8 / 0.7	RG2675-11
.15 ± 20%	22	↑	900V	27.5	17.5	10.5	20 ± 2	0.8 / 0.7	RG2676-1
.15 ± 20%	33		900V	27.5	17.5	10.5	20 ± 2	0.8 / 0.7	RG2676-2
.15 ± 20%	47		900V	27.5	17.5	10.5	20 ± 2	0.8 / 0.7	RG2676-3
.15 ± 20%	68		900V	27.5	17.5	10.5	20 ± 2	0.8 / 0.7	RG2676-4
.15 ± 20%	82		900V	27.5	17.5	10.5	20 ± 2	0.8 / 0.7	RG2676-5
.15 ± 20%	100		900V	27.5	17.5	10.5	20 ± 2	0.8 / 0.7	RG2676-6
.15 ± 20%	150		900V	27.5	17.5	10.5	20 ± 2	0.8 / 0.7	RG2676-7
.15 ± 20%	220		900V	27.5	17.5	10.5	20 ± 2	0.8 / 0.7	RG2676-8
.15 ± 20%	330		900V	27.5	17.5	10.5	20 ± 2	0.8 / 0.7	RG2676-9
.15 ± 20%	470		900V	27.5	17.5	10.5	20 ± 2	0.8 / 0.7	RG2676-10
.15 ± 20%	680		900V	27.5	17.5	10.5	20 ± 2	0.8 / 0.7	RG2676-11
.25 ± 10%	22	↑ 600 VDC 250 VAC ↓	900V	36.8	19.0	10.5	30 ± 2	0.8 / 0.7	RG2677-1
.25 ± 10%	33		900V	36.8	19.0	10.5	30 ± 2	0.8 / 0.7	RG2677-2
.25 ± 10%	47		900V	36.8	19.0	10.5	30 ± 2	0.8 / 0.7	RG2677-3
.25 ± 10%	68		900V	36.8	19.0	10.5	30 ± 2	0.8 / 0.7	RG2677-4
.25 ± 10%	82		900V	36.8	19.0	10.5	30 ± 2	0.8 / 0.7	RG2677-5
.25 ± 10%	100		900V	36.8	19.0	10.5	30 ± 2	0.8 / 0.7	RG2677-6
.25 ± 10%	150		900V	36.8	19.0	10.5	30 ± 2	0.8 / 0.7	RG2677-7
.25 ± 10%	220		900V	36.8	19.0	10.5	30 ± 2	0.8 / 0.7	RG2677-8
.25 ± 10%	330		900V	36.8	19.0	10.5	30 ± 2	0.8 / 0.7	RG2677-9
.25 ± 10%	470		900V	36.8	19.0	10.5	30 ± 2	0.8 / 0.7	RG2677-10
.25 ± 10%	680		900V	36.8	19.0	10.5	30 ± 2	0.8 / 0.7	RG2677-11
.50 ± 20%	22	↓	900V	36.8	23.3	15.0	30 ± 2	0.8 / 0.7	RG2678-1
.50 ± 20%	33		900V	36.8	23.3	15.0	30 ± 2	0.8 / 0.7	RG2678-2
.50 ± 20%	47		900V	36.8	23.3	15.0	30 ± 2	0.8 / 0.7	RG2678-3
.50 ± 20%	68		900V	36.8	23.3	15.0	30 ± 2	0.8 / 0.7	RG2678-4
.50 ± 20%	82		900V	36.8	23.3	15.0	30 ± 2	0.8 / 0.7	RG2678-5
.50 ± 20%	100		900V	36.8	23.3	15.0	30 ± 2	0.8 / 0.7	RG2678-6
.50 ± 20%	150		900V	36.8	23.3	15.0	30 ± 2	0.8 / 0.7	RG2678-7
.50 ± 20%	220		900V	36.8	23.3	15.0	30 ± 2	0.8 / 0.7	RG2678-8
.50 ± 20%	330		900V	36.8	23.3	15.0	30 ± 2	0.8 / 0.7	RG2678-9
.50 ± 20%	470		900V	36.8	23.3	15.0	30 ± 2	0.8 / 0.7	RG2678-10
.50 ± 20%	680		900V	36.8	23.3	15.0	30 ± 2	0.8 / 0.7	RG2678-11

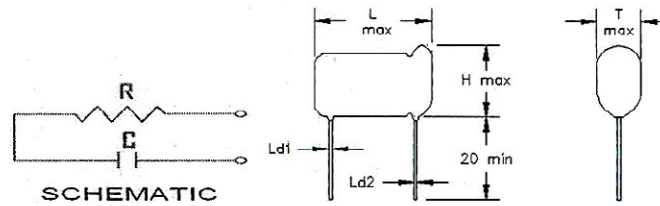