
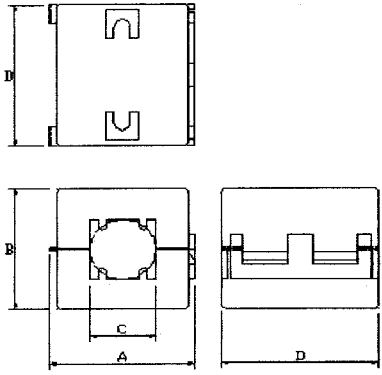


SPECIFICATION


CUSTOMER:		CUST.P/N:	
ITEM:	KCF-65-B	K.C.P/N:	PK1501CM
(1) SHAPE : 		A	20.5±1.0 m/m
		B	20±1.0 m/m
		C	7.5±1.0 m/m
		D	33±1.0 m/m
		E	6.5±0.3(CORE內徑) m/m
		F	m/m
		G	m/m
(2) ELECTRICAL REQUIREMENTS: $Z_1 = 132^{-0} \text{ OHM AT } 25 \text{ MHz}$ $Z_2 = 200^{-0} \text{ OHM AT } 100 \text{ MHz}$		(3) TEST CONDITIONS: 1. IMPEDANCE ANALYZER: HP4191A TEST FIXTURE: HP16092A 2. WIRE: $\Phi 0.65$ 2UEW*100m/m1/2TS 3. DRAWING: 	
(4) PACKING <input type="checkbox"/> IN BULK <input checked="" type="checkbox"/> VACUUM <input type="checkbox"/> INSERTION PCS/BAGS* BAG/INNER BOX* BOXES/CARTON = 1600 PCS 56 PCS/PLATE*6 PLATES/CARTON= 336 PCS PCS/TRAY* TRAYS/CARTON= PCS		(5) APPEARANCE (1) AREA OF BREAK : <1 m/m ² (2) SUM OF BREAKING AREA : <2 m/m ² (3) DEPTH OF BREAK : <1 m/m	
(6) REMARK:		Approved by	
		Checked by	
		Drawn by	
		DWG.NO.	

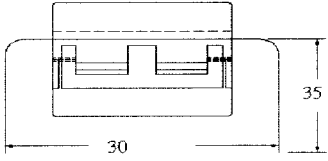

King Core Electronics Inc.
 Tel: 886-3-4782511(Rep.)
 Fax: 886-3-4759923
 E-mail: kc@mail.kingcore.com.tw

KCF-65-B

PK1501CM

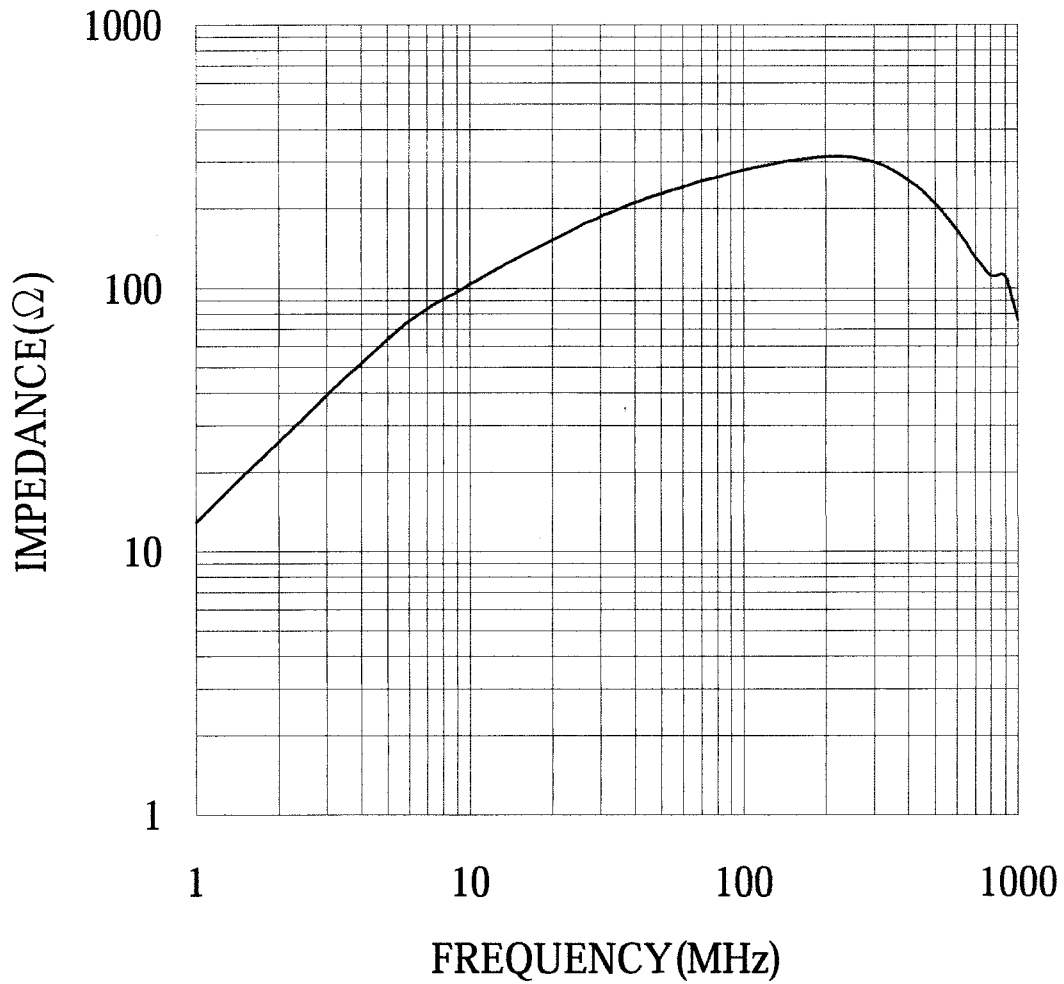

King Core Electronics Inc.

Tel: 886-3-4782511 (Rep.)

Fax: 886-3-4759923

E-mail: kc@mail.kingcore.com.tw