CIRCUIT INTERRUPTION TECHNOLOGY INC.

32mm Fuses

ORDERING INFORMATION

1. Series:	AFE	3A
ATE/ATP		
AFE/AGE		
AFP/AGP		
ADL/ADP		
ABE/ABP		
ADA/APA		

2. Ampere Rating:
Available ampere ratings listed below with each product

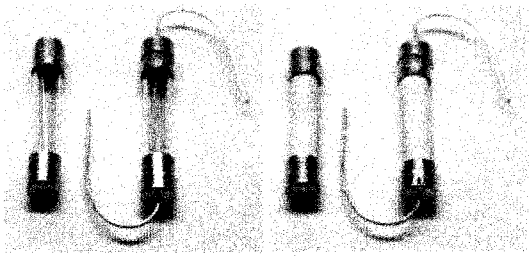

E197128

32mm Fuses

ATE Time Delay Glass	***Size:** 6.3 X 32mm ***Ampere Rating:** .5 to 8A ***Voltage Rating:** 125 / 250VAC ***Electrical Characteristics:** 135% - 1 hour maximum 200% - 2 seconds ~ 2 minutes maximum		**ATP** Time Delay Glass	***Size:** 6.3 X 32mm ***Ampere Rating:** .5 to 8A ***Voltage Rating:** 125 / 250VAC ***Electrical Characteristics:** 135% - 1 hour maximum 200% - 2 seconds ~ 2 minutes maximum
 **AFE/AGE** Fast Acting Glass	***Size:** 6.3 X 32mm ***Ampere Rating:** AGE: .10 to .40A AFE: .50 to 10A AFE: 12 to 30A / 32Vac ***Voltage Rating:** 125 / 250VAC ***Electrical Characteristics:** 135% - 1 hour maximum 200% - 5 seconds maximum		**AFP/AGP** Fast Acting Glass	***Size:** 6.3 X 32mm ***Ampere Rating:** AGP: .10 to .40A AFP: .50 to 10A ***Voltage Rating:** 125 / 250VAC ***Electrical Characteristics:** 135% - 1 hour maximum 200% - 5 seconds maximum
ADL Time Delay Glass	***Size:** 6.3 X 32mm ***Ampere Rating:** .63 to 10A ***Voltage Rating:** 125 / 250VAC ***Electrical Characteristics:** 135% - 1 hour maximum 200% - 2 seconds ~ 2 minutes maximum - less than 3A 200% - 12 seconds ~ 2 minutes maximum - greater than 3A		**ADP** Time Delay Glass	***Size:** 6.3 X 32mm ***Ampere Rating:** .63 to 10A ***Voltage Rating:** 125 / 250VAC ***Electrical Characteristics:** 135% - 1 hour maximum 200% - 2 seconds ~ 2 minutes maximum - less than 3A 200% - 12 seconds ~ 2 minutes maximum - greater than 3A
ABE Fast Acting Ceramic	***Size:** 6.3 X 32mm ***Ampere Rating:** .01 to 25A ***Voltage Rating:** 125 / 250VAC ***Electrical Characteristics:** 135% - 1 hour maximum 200% - 30 seconds maximum		**ABP** Fast Acting Ceramic	***Size:** 6.3 X 32mm ***Ampere Rating:** .01 to 25A ***Voltage Rating:** 125 / 250VAC ***Electrical Characteristics:** 135% - 1 hour maximum 200% - 30 seconds maximum
ADA Time Delay Ceramic	***Size:** 6.3 X 32mm ***Ampere Rating:** .1 to 20A ***Voltage Rating:** 125 / 250VAC ***Electrical Characteristics:** 135% - 1 hour maximum 200% - 5 seconds ~ 2 minutes maximum - less than 3A 200% - 12 seconds ~ 2 minutes maximum - greater than 3A		**APA** Time Delay Ceramic	***Size:** 6.3 X 32mm ***Ampere Rating:** .1 to 20A ***Voltage Rating:** 125 / 250VAC ***Electrical Characteristics:** 135% - 1 hour maximum 200% - 5 seconds ~ 2 minutes maximum - less than 3A 200% - 12 seconds ~ 2 minutes maximum - greater than 3A