

RoHS Compliant

Half Pitch DIP

Dimensions

Electrical Ratings	switch : 25mA @ 24VDC carry : 100mA @ 24VDC	Dielectric Strength	500Vrms min
Electrical Life	2,000 cycles typical	Insulation Resistance	>100MΩ min
Contact Resistance	<25mΩ initial	Operating Temperature	-40°C to 85°C
Actuation Force	500gF maximum	Storage Temperature	-40°C to 85°C
Actuator Travel	0.65mm		

Materials

Actuator	6T Nylon, UL94-V0, white
Cover	6T Nylon, UL94V-0, black
Housing	6T Nylon, UL94V-0, black
Contacts	Beryllium Copper, Gold over Nickel Plated
Terminals	Brass, Gold Plated at contact area, Tin Plated at terminal

Ordering Information

1. Series	KE	08	R	T	G	T
KE						
2. Number of Positions						
02 = 2 positions						
04 = 4 positions						
06 = 6 positions						
08 = 8 positions						
10 = 10 positions						
3. Actuator Height						
R = Recessed						
4. Tape Seal						
X = No TapeSseal						
T = Tape Seal						
5. Terminal Options						
G = Gull Wing						
J = "J" Lead						
6. Packaging Options						
T = Tube						
R = Tape & Reel						



Specifications and availability subject to change without notice.

Dimensions shown in mm. Dimensions are shown for reference purposes only.

KE




Half Pitch DIP

Dimensions

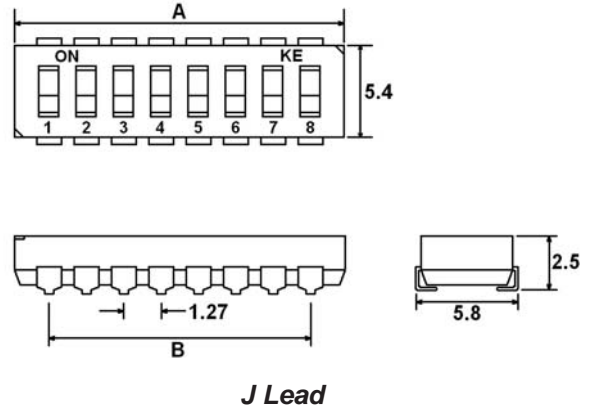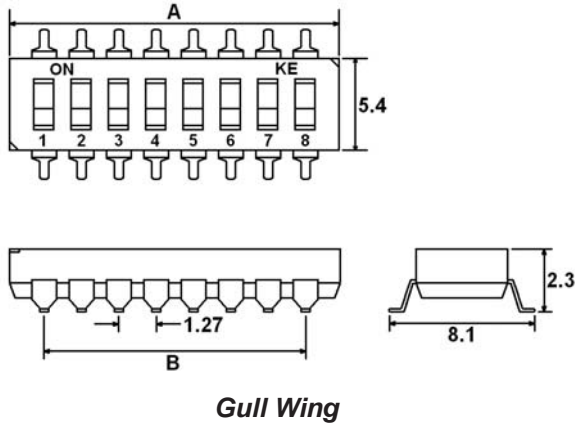

Number of Positions	"A" mm	"B" mm
02	4.12	1.27
04	6.66	3.81
06	9.20	6.35
08	11.74	8.89
10	14.28	11.43

Schematic & PC Layout

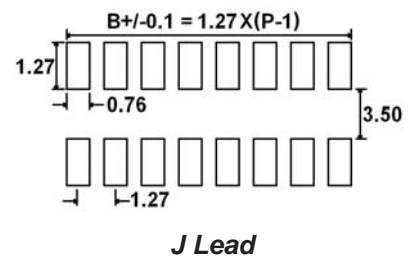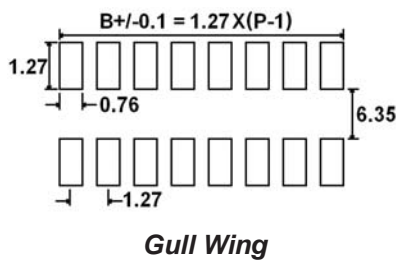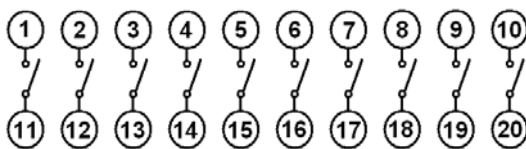

Packaging Specifications

- All switches packaged in OFF position

Dimensions shown in mm. Dimensions are shown for reference purposes only.

Specifications and availability subject to change without notice.