

## 80×80×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 82g

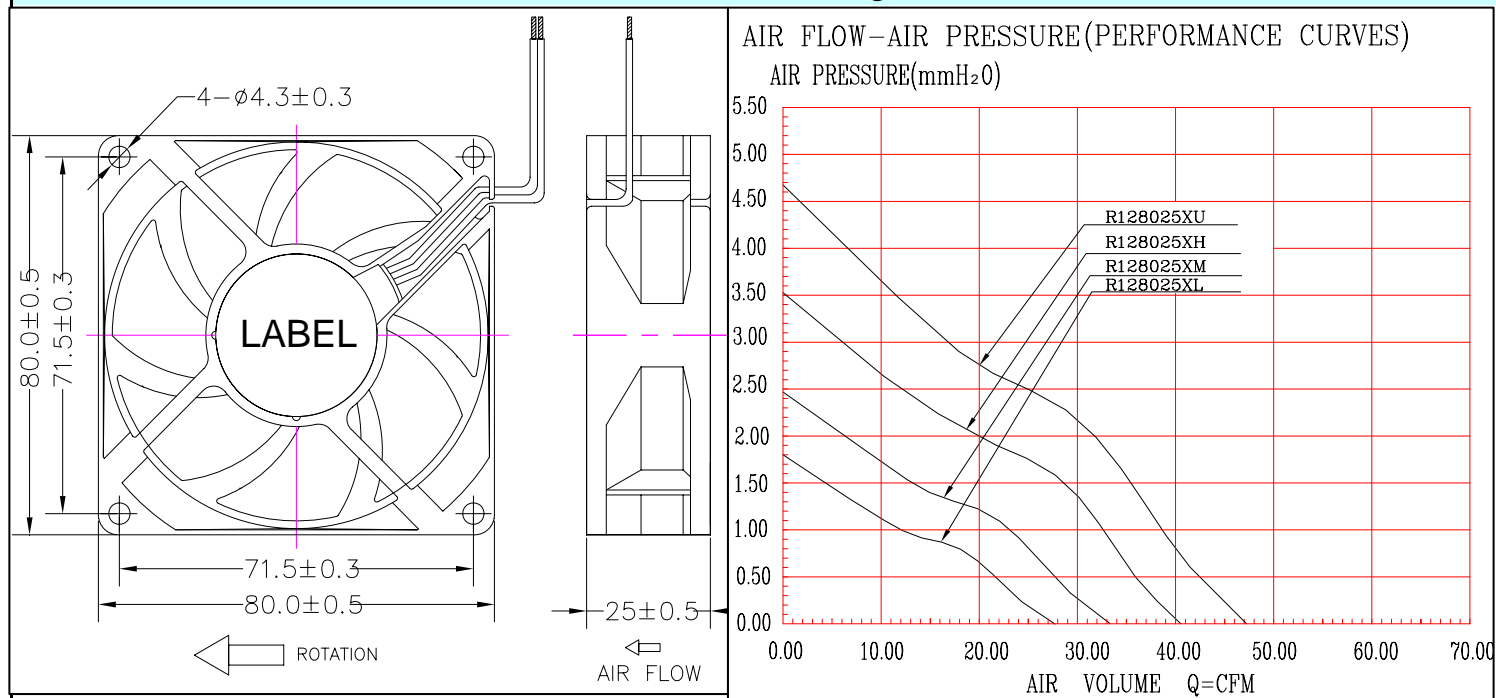

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH <sub>2</sub> O)	Sound level dB(A)
						(CFM)	m <sup>3</sup> /min		
R128025BL	12	7~13.2	0.10	1.20	2050	27.61	0.78	1.80	26
R128025BM	12	7~13.2	0.14	1.68	2400	33.40	0.95	2.47	29
R128025BH	12	7~13.2	0.19	2.28	2900	40.51	1.15	3.56	32.5
R128025BU	12	7~13.2	0.24	2.88	3400	47.48	1.35	4.67	36.5
R128025DL	12	7~13.2	0.10	1.20	2050	27.61	0.78	1.80	26
R128025DM	12	7~13.2	0.14	1.68	2400	33.40	0.95	2.47	29
R128025DH	12	7~13.2	0.19	2.28	2900	40.51	1.15	3.56	32.5
R128025DU	12	7~13.2	0.24	2.88	3400	47.48	1.35	4.67	36.5
R128025SL	12	7~13.2	0.09	1.08	2050	27.61	0.78	1.80	26
R128025SM	12	7~13.2	0.14	1.68	2400	33.40	0.95	2.47	29
R128025SH	12	7~13.2	0.19	2.28	2900	40.51	1.15	3.56	32.5
R128025SU	12	7~13.2	0.28	3.36	3400	47.48	1.35	4.67	36.5

\*Sound level measured at the distance of one meter from the axis of intake.

\*Specifications are subject change without notice.

## 80×80×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 82g

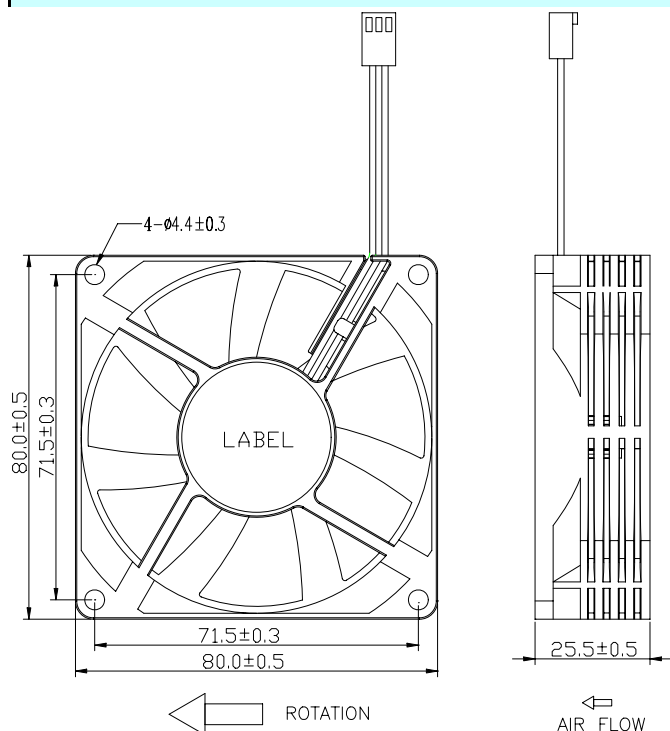

AIR PRESSURE-AIR FLOW (PERFORMANCE CURVES)

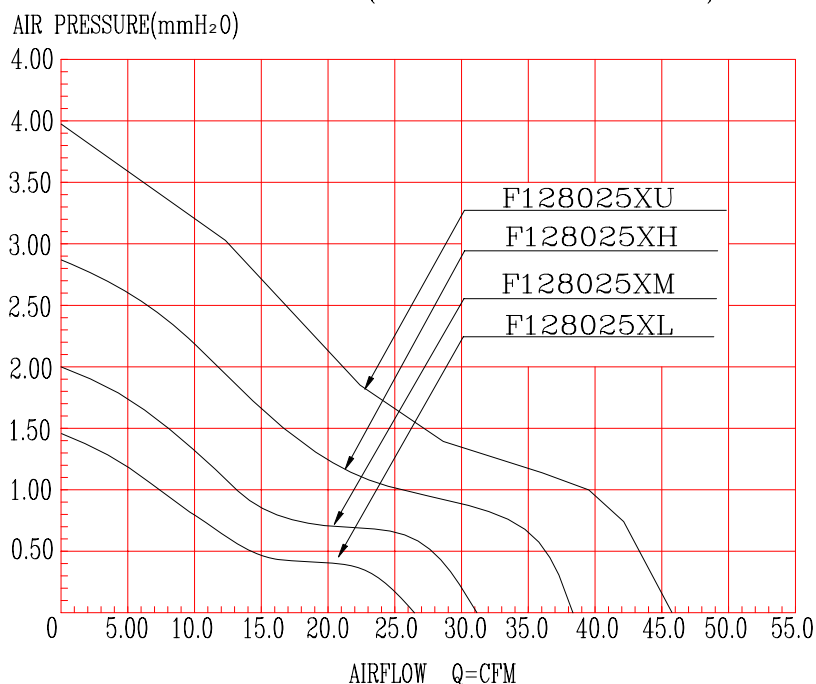

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH <sub>2</sub> O)	Sound level dB(A)
						(CFM)	m <sup>3</sup> /min		
F128025BL	12	7~13.2	0.10	1.20	2050	26.53	0.75	1.46	22.3
F128025BM	12	7~13.2	0.14	1.68	2400	31.05	0.88	2.00	26.4
F128025BH	12	7~13.2	0.19	2.28	2900	38.46	1.09	2.88	30.6
F128025BU	12	7~13.2	0.24	2.88	3400	45.09	1.28	3.96	34.7
F128025DL	12	7~13.2	0.10	1.20	2050	26.53	0.75	1.46	22.3
F128025DM	12	7~13.2	0.14	1.68	2400	31.05	0.88	2.00	26.4
F128025DH	12	7~13.2	0.19	2.28	2900	38.46	1.09	2.88	30.6
F128025DU	12	7~13.2	0.24	2.88	3400	45.09	1.28	3.96	34.7
F128025SL	12	7~13.2	0.09	1.08	2050	26.53	0.75	1.46	22.3
F128025SM	12	7~13.2	0.14	1.68	2400	31.05	0.88	2.00	26.4
F128025SH	12	7~13.2	0.19	2.28	2900	38.46	1.09	2.88	30.6
F128025SU	12	7~13.2	0.28	3.36	3400	45.09	1.28	3.96	34.7

\*Sound level measured at the distance of one meter from the axis of intake.

\*Specifications are subject change without notice.



# EVERFLOW

## 80×80×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 74g

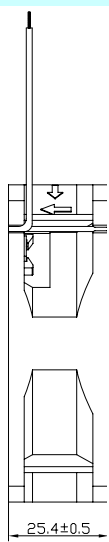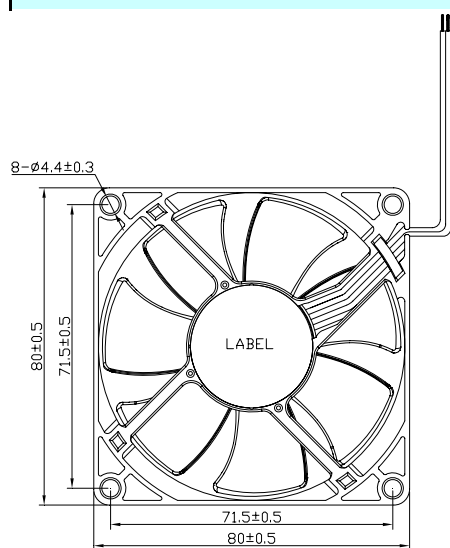

AIR FLOW—AIR PRESSURE(PERFORMANCE CURVES)  
AIR PRESSURE(mmH<sub>2</sub>O)

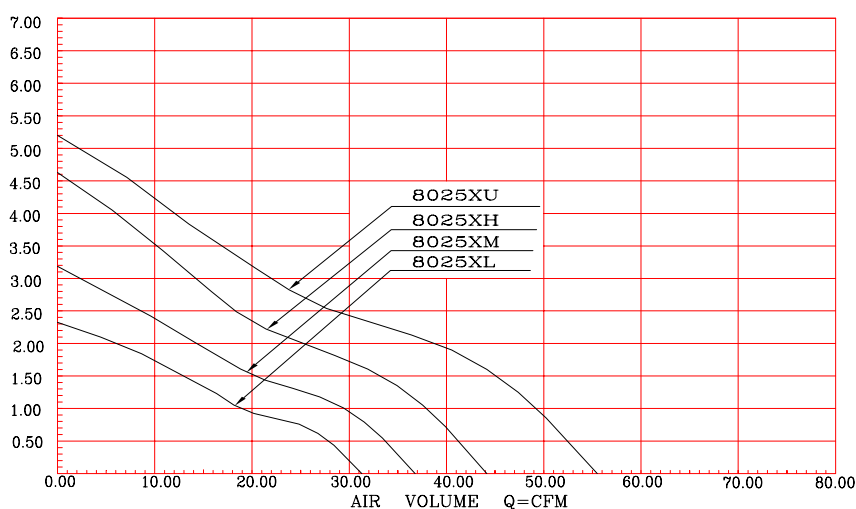

此基架模具有:8個螺絲孔及4個螺絲孔.

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH <sub>2</sub> O)	Sound level dB(A)
						(CFM)	m <sup>3</sup> /min		
F128025BL	12	7~13.2	0.10	1.20	2050	29.10	0.82	1.80	23.2
F128025BM	12	7~13.2	0.14	1.68	2400	34.35	0.97	2.46	25.8
F128025BH	12	7~13.2	0.19	2.28	2900	41.30	1.17	3.35	32.6
F128025BU	12	7~13.2	0.24	2.88	3400	49.52	1.40	4.66	35.5
F128025DL	12	7~13.2	0.10	1.20	2050	29.10	0.82	1.80	23.2
F128025DM	12	7~13.2	0.14	1.68	2400	34.35	0.97	2.46	25.8
F128025DH	12	7~13.2	0.19	2.28	2900	41.30	1.17	3.35	32.6
F128025DU	12	7~13.2	0.24	2.88	3400	49.52	1.40	4.66	35.5
F128025SL	12	7~13.2	0.09	1.08	2050	29.10	0.82	1.80	23.2
F128025SM	12	7~13.2	0.14	1.68	2400	34.35	0.97	2.46	25.8
F128025SH	12	7~13.2	0.19	2.28	2900	41.30	1.17	3.35	32.6
F128025SU	12	7~13.2	0.28	3.36	3400	49.52	1.40	4.66	35.5

\*Sound level measured at the distance of one meter from the axis of intake.

\*Specifications are subject change without notice.



# EVERFLOW

## 80×80×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 82g

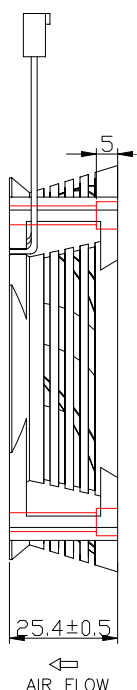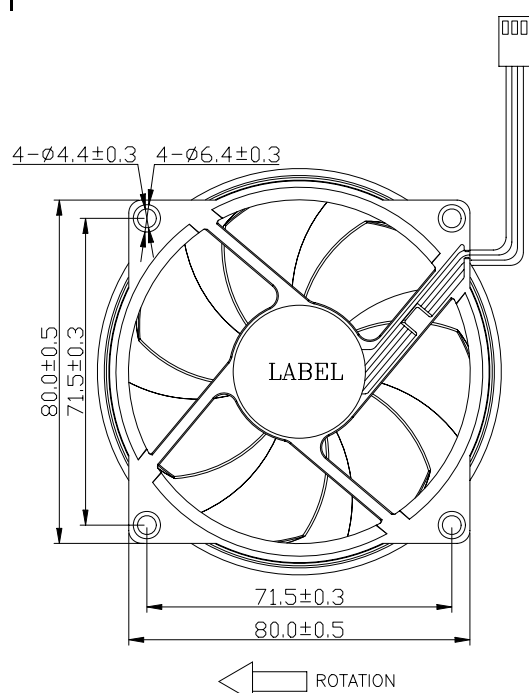

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)  
AIR PRESSURE(mmH<sub>2</sub>O)

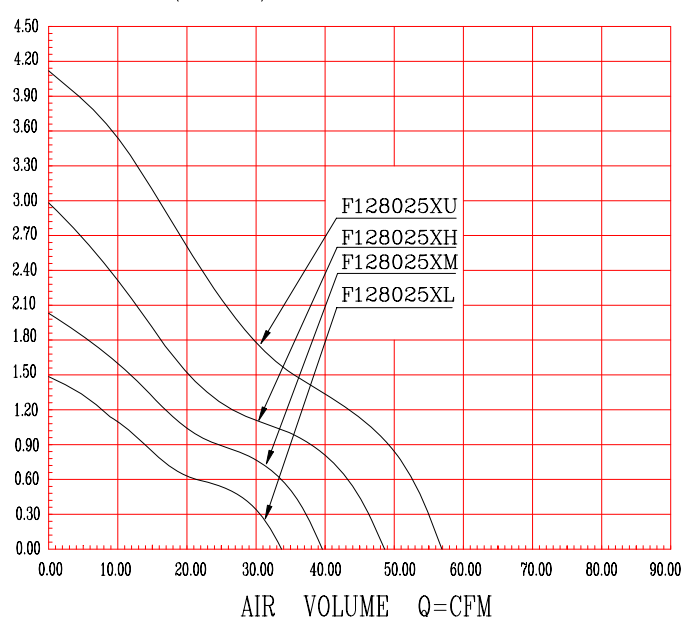

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH <sub>2</sub> O)	Sound level dB(A)
						(CFM)	m <sup>3</sup> /min		
F128025BL	12	7~13.2	0.10	1.20	2050	33.80	0.96	1.48	21.9
F128025BM	12	7~13.2	0.14	1.68	2400	39.57	1.12	2.03	25.3
F128025BH	12	7~13.2	0.19	2.28	2900	48.60	1.38	2.99	30.5
F128025BU	12	7~13.2	0.24	2.88	3400	56.98	1.61	4.11	36.1
F128025DL	12	7~13.2	0.10	1.20	2050	33.80	0.96	1.48	21.9
F128025DM	12	7~13.2	0.14	1.68	2400	39.57	1.12	2.03	25.3
F128025DH	12	7~13.2	0.19	2.28	2900	48.60	1.38	2.99	30.5
F128025DU	12	7~13.2	0.24	2.88	3400	56.98	1.61	4.11	36.1
F128025SL	12	7~13.2	0.09	1.08	2050	33.80	0.96	1.48	21.9
F128025SM	12	7~13.2	0.14	1.68	2400	39.57	1.12	2.03	25.3
F128025SH	12	7~13.2	0.19	2.28	2900	48.60	1.38	2.99	30.5
F128025SU	12	7~13.2	0.28	3.36	3400	56.98	1.61	4.11	36.1

\*Sound level measured at the distance of one meter from the axis of intake.

\*Specifications are subject change without notice.

## 80×80×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)


Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 82g

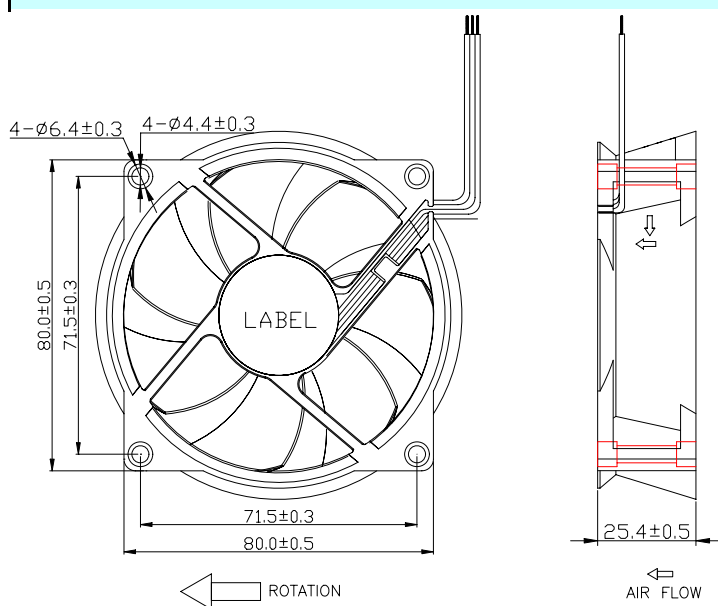

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)  
AIR PRESSURE(mmH<sub>2</sub>O)

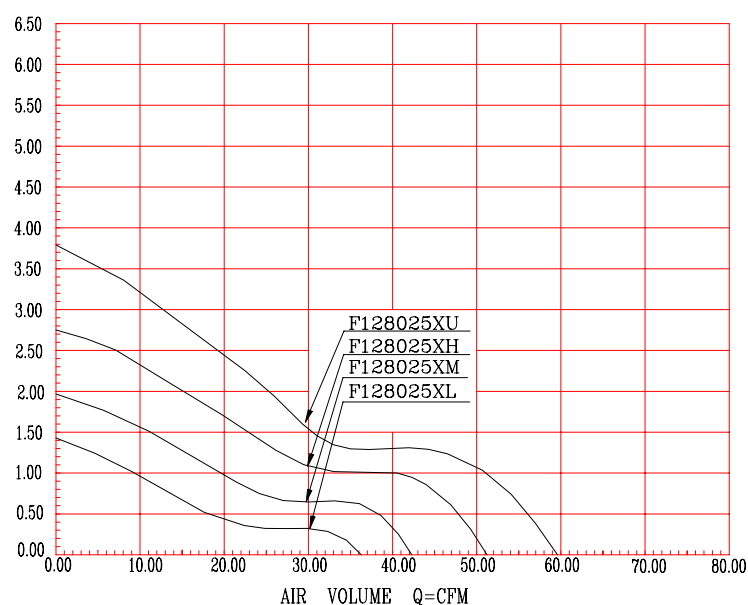

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH <sub>2</sub> O)	Sound level dB(A)
						(CFM)	m <sup>3</sup> /min		
F128025BL	12	7~13.2	0.10	1.20	2050	36.12	1.02	1.43	23.7
F128025BM	12	7~13.2	0.14	1.68	2400	42.29	1.20	1.96	28.8
F128025BH	12	7~13.2	0.19	2.28	2900	51.16	1.45	2.75	32.3
F128025BU	12	7~13.2	0.24	2.88	3400	59.53	1.69	3.78	38.5
F128025DL	12	7~13.2	0.10	1.20	2050	36.12	1.02	1.43	23.7
F128025DM	12	7~13.2	0.14	1.68	2400	42.29	1.20	1.96	28.8
F128025DH	12	7~13.2	0.19	2.28	2900	51.16	1.45	2.75	32.3
F128025DU	12	7~13.2	0.24	2.88	3400	59.53	1.69	3.78	38.5
F128025SL	12	7~13.2	0.09	1.08	2050	36.12	1.02	1.43	23.7
F128025SM	12	7~13.2	0.14	1.68	2400	42.29	1.20	1.96	28.8
F128025SH	12	7~13.2	0.19	2.28	2900	51.16	1.45	2.75	32.3
F128025SU	12	7~13.2	0.28	3.36	3400	59.53	1.69	3.78	38.5

\*Sound level measured at the distance of one meter from the axis of intake.

\*Specifications are subject change without notice.

## 80×80×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 82g

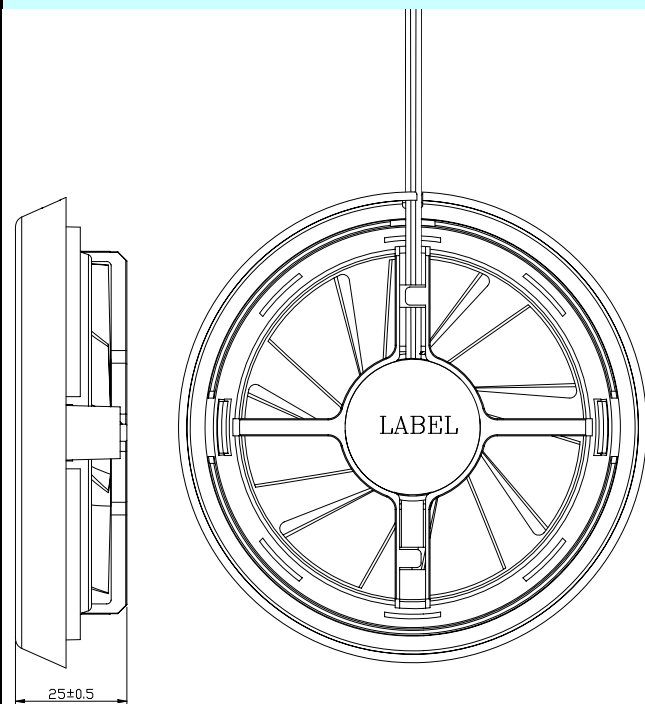

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH<sub>2</sub>O)

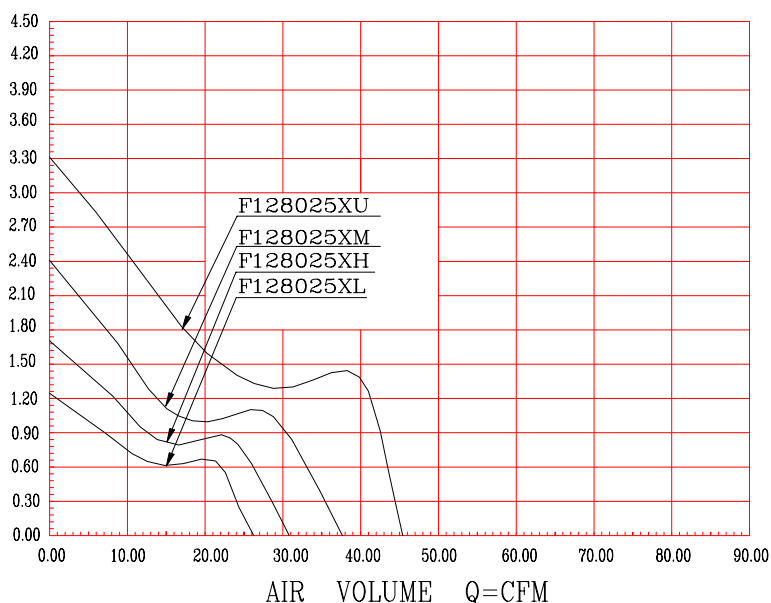

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH <sub>2</sub> O)	Sound level dB(A)
						(CFM)	m <sup>3</sup> /min		
R128025BL	12	7~13.2	0.10	1.20	2050	26.31	0.75	1.24	23
R128025BM	12	7~13.2	0.14	1.68	2400	30.81	0.87	1.70	27.1
R128025BH	12	7~13.2	0.19	2.28	2900	38.61	1.09	2.41	31.3
R128025BU	12	7~13.2	0.24	2.88	3400	45.26	1.28	3.32	35.1
R128025DL	12	7~13.2	0.10	1.20	2050	26.31	0.75	1.24	23
R128025DM	12	7~13.2	0.14	1.68	2400	30.81	0.87	1.70	27.1
R128025DH	12	7~13.2	0.19	2.28	2900	38.61	1.09	2.41	31.3
R128025DU	12	7~13.2	0.24	2.88	3400	45.26	1.28	3.32	35.1
R128025SL	12	7~13.2	0.09	1.08	2050	26.31	0.75	1.24	23
R128025SM	12	7~13.2	0.14	1.68	2400	30.81	0.87	1.70	27.1
R128025SH	12	7~13.2	0.19	2.28	2900	38.61	1.09	2.41	31.3
R128025SU	12	7~13.2	0.28	3.36	3400	45.26	1.28	3.32	35.1

\*Sound level measured at the distance of one meter from the axis of intake.

\*Specifications are subject change without notice.

## 80×80×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing


Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance


Operating Temp : ~10~70°C

Weight : 82g

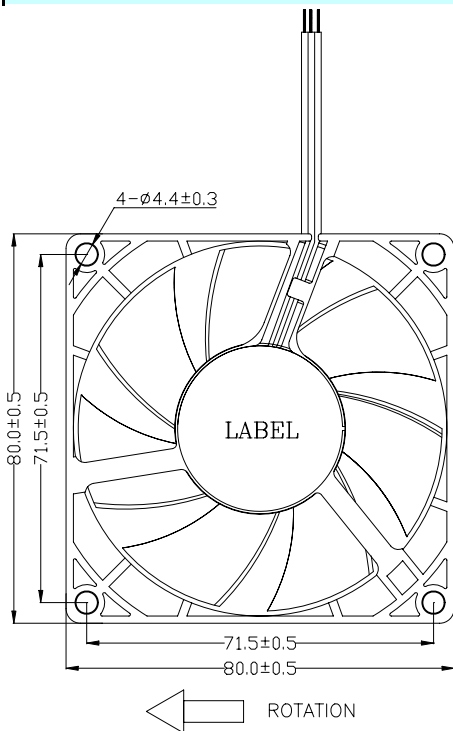

AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

AIR PRESSURE(mmH<sub>2</sub>O)

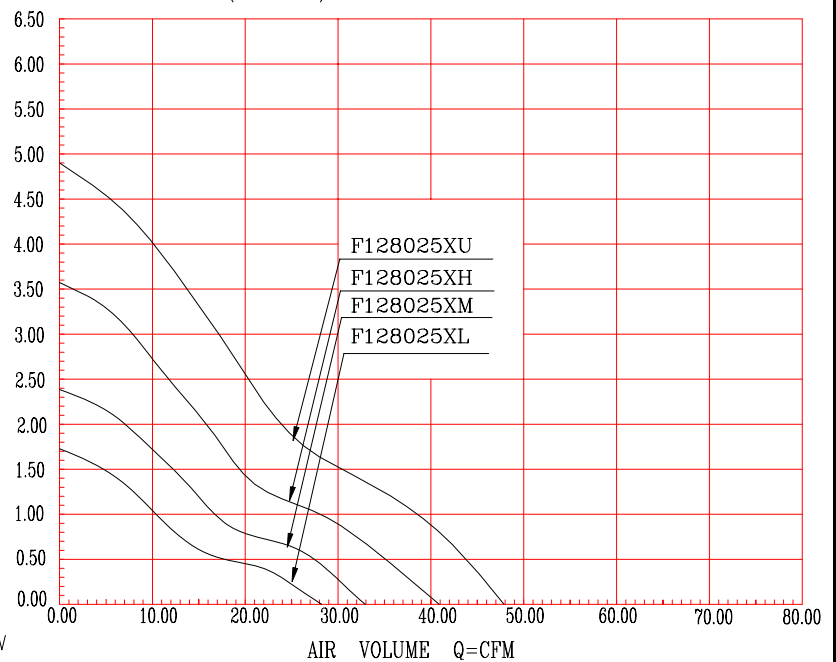

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH <sub>2</sub> O)	Sound level dB(A)
						(CFM)	m <sup>3</sup> /min		
R128025BL	12	7~13.2	0.10	1.20	2050	28.18	0.80	1.73	26
R128025BM	12	7~13.2	0.14	1.68	2400	32.99	0.93	2.37	29.8
R128025BH	12	7~13.2	0.19	2.28	2900	40.83	1.16	3.57	35.9
R128025BU	12	7~13.2	0.24	2.88	3400	47.87	1.36	4.90	39.2
R128025DL	12	7~13.2	0.10	1.20	2050	28.18	0.80	1.73	26
R128025DM	12	7~13.2	0.14	1.68	2400	32.99	0.93	2.37	29.8
R128025DH	12	7~13.2	0.19	2.28	2900	40.83	1.16	3.57	35.9
R128025DU	12	7~13.2	0.24	2.88	3400	47.87	1.36	4.90	39.2
R128025SL	12	7~13.2	0.09	1.08	2050	28.18	0.80	1.73	26
R128025SM	12	7~13.2	0.14	1.68	2400	32.99	0.93	2.37	29.8
R128025SH	12	7~13.2	0.19	2.28	2900	40.83	1.16	3.57	35.9
R128025SU	12	7~13.2	0.28	3.36	3400	47.87	1.36	4.90	39.2

\*Sound level measured at the distance of one meter from the axis of intake.

\*Specifications are subject change without notice.

## 80×80×25MM SERIES

Bearing Type: Two ball bearing

EBR

One Ball One Sleeve Bearing



Material : Housing Plastic (UL : 94V-0)

Impeller Plastic (UL : 94V-0)

Protection : Auto-Restart /Impedance

Operating Temp : ~10~70°C

Weight : 82g

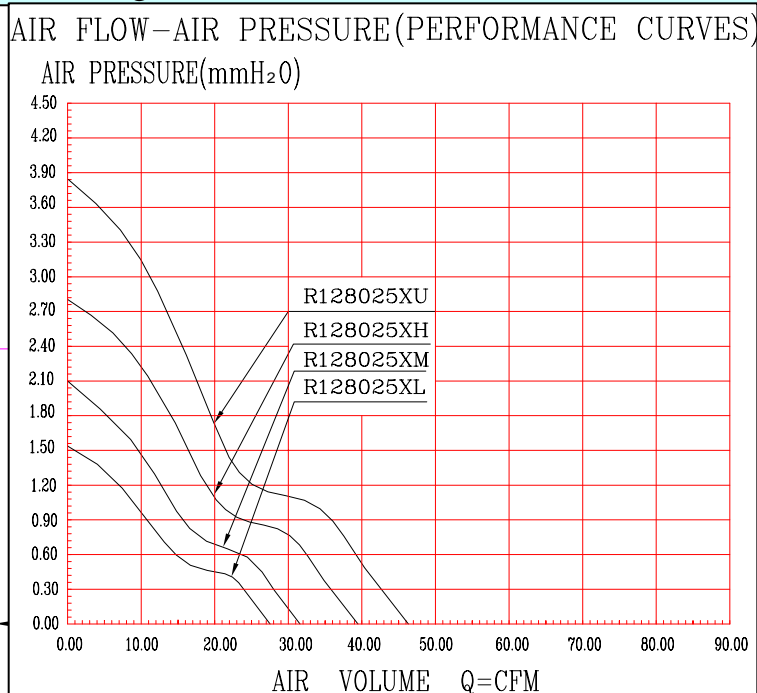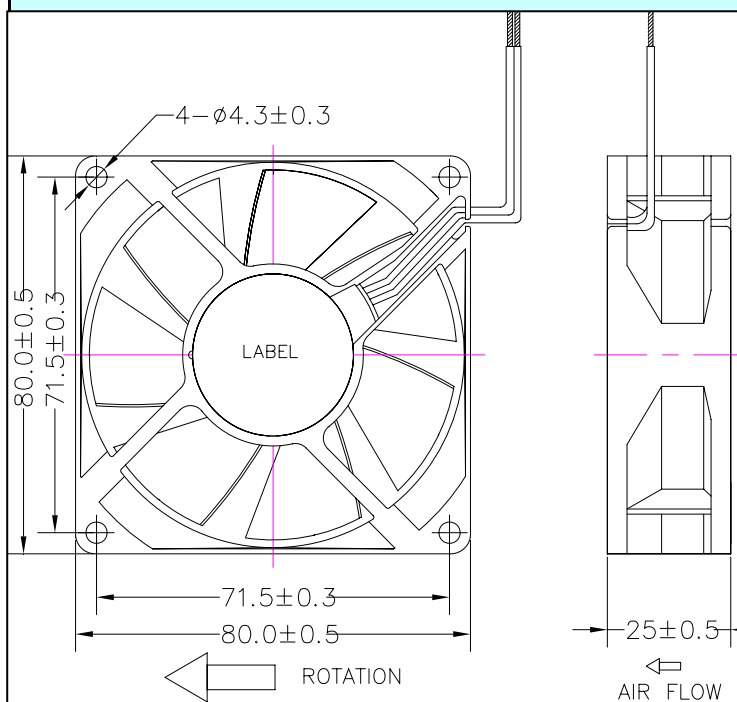

MODEL	Rated Voltage (V)	Operating Voltage Range (V)	Rated Current (Amp)	Rated Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH <sub>2</sub> O)	Sound level dB(A)
						(CFM)	m <sup>3</sup> /min		
R128025BL	12	7~13.2	0.10	1.20	2050	27.06	0.77	1.53	25.5
R128025BM	12	7~13.2	0.14	1.68	2400	31.68	0.90	2.10	28.7
R128025BH	12	7~13.2	0.19	2.28	2900	39.39	1.12	2.80	32.5
R128025BU	12	7~13.2	0.24	2.88	3400	46.18	1.31	3.85	35.3
R128025DL	12	7~13.2	0.10	1.20	2050	27.06	0.77	1.53	25.5
R128025DM	12	7~13.2	0.14	1.68	2400	31.68	0.90	2.10	28.7
R128025DH	12	7~13.2	0.19	2.28	2900	39.39	1.12	2.80	32.5
R128025DU	12	7~13.2	0.24	2.88	3400	46.18	1.31	3.85	35.3
R128025SL	12	7~13.2	0.09	1.08	2050	27.06	0.77	1.53	25.5
R128025SM	12	7~13.2	0.14	1.68	2400	31.68	0.90	2.10	28.7
R128025SH	12	7~13.2	0.19	2.28	2900	39.39	1.12	2.80	32.5
R128025SU	12	7~13.2	0.28	3.36	3400	46.18	1.31	3.85	35.3

\*Sound level measured at the distance of one meter from the axis of intake.

\*Specifications are subject change without notice.