


4	3	2	1
DRAWING MADE IN THIRD ANGLE PROJECTION.			
THIS DRAWING IS UNPUBLISHED.			
BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.			
COPYRIGHT 19 19			
PROD	LOC	LIST	REV
3321	DF	XO	F
CODE			
ZONE		LTR	DATE
K			9-94
REV & REDRAWN; 0600-1413-93 CT 9-94 JC			

ASSEMBLED VIEW



RECOMMENDED STRIP LENGTH
SCALE: N.T.S.

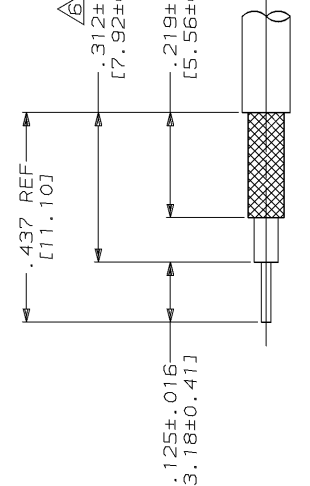

SHELL ASSEMBLY
MATERIAL: BRASS PER
ASTM-B-16
FINISH: GOLD PLATE PER
MIL-G-45204.

CONTACT
MATERIAL: BRASS PER
ASTM-B-16
FINISH: GOLD PLATE PER
MIL-G-45204.

FERRULE
MATERIAL: COPPER PER
ASTM-B-152.
FINISH: GOLD PLATE PER
MIL-G-45204

DIELECTRIC
MATERIAL: TEFLON PER MIL-P-19468A

- FOR USE WITH RG-188/U, 188A/U & 316/U COAX CABLE.
 - FERRULE CRIMPING TOOL: AMP TOOL #220066-1 OR 220066-2 OR 220009-1.
 - CONTACT CRIMPING TOOL: M22520/2-01 OR AMP TOOL NUMBER 1-601966-6, SETTING NUMBER 5, DANIELS POSITIONER PART NO. K345 OR AMP TOOL NO. 1-601966-6.
 - SEE I.S.2348.
 - DANIELS MANUFACTURING CORP
2266 FRANKLIN ROAD
BLOOMFIELD HILLS, MI 48013
- △ OUTER JACKET OF CABLE MUST BE TRIMMED TO ALLOW PROPER INTER-PIN CONTACT LOCATION AFTER FERRULE CRIMP OPERATION.
- PARTS SHIPPED UNASSEMBLED AND CABLE IS SUPPLIED BY CUSTOMER.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm]		DR 9-12-94 C.C.THOMAS
TOLERANCES - ON +	CHK 9-23-94 J.CABARLO	
2 PL DEC ±	APPD 9-23-94 J.CABARLO	
ANGLES ±	APPD 9-23-94 C.C.THOMAS	
MATERIAL	PRODUCT SPEC 108-12045	
SEE CALLOUTS	APPLICATION SPEC	
SEE CALLOUTS	WEIGHT -	

AMP AMP Incorporated Harrisburg, PA 17105-3608		225791-3 PART NO.
NAME CONNECTOR, COAXIAL, RF SOCKET SIZE 5, ARINC (HEX CRIMP)		
SIZE C 00779	DRAWING NO C=225791-3	SHEET 1 OF 1
SCALE 5:1	CUSTOMER DRAWING	