

HUBER+SUHNER® DATA SHEET


Engineering Sample: 1x8A_81_MXP-S50-0-1

Description

1x8 ganged SMT PCB connector (male, asymmetric design)

Interface standard
HUBER+SUHNER standard (Patent pending)

Evaluation board material/configuration
Material: N/A
Substrate thickness: N/A
Dielectric constant ϵ_r : N/A
Stack up: N/A

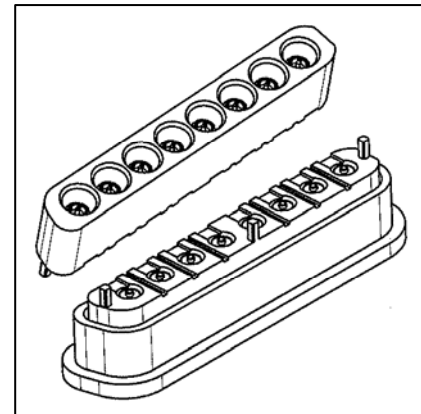

Technical Data

Electrical Data

Impedance	50 Ω
Data rates	Up to 40 Gbps
Interface frequency	40 GHz
Frequency range	DC to 22.5 GHz
Return loss	≥ 20 dB up to 22.5 GHz
Cross talk	≤ -40 dB at PCB transition
Electrical Length	N/A

Mechanical Data

Number of matings	500
Weight	-

Environmental Data

Operating Temperature	- 55 °C to + 85 °C
2002/95/EC (RoHS)	compliant

Material Data

Piece Parts (MXP male)	Material
Centre contact	Copper Beryllium Alloy
Outer contact	Copper Beryllium Alloy / C97
Body	Brass
Insulator	PEEK
Coupling nut	N/A


Surface Plating
SUCOPRO Plating
SUCOPRO Plating
SUCOPRO Plating

Related Documents

Outline drawing	DOU-00145659
Catalogue drawing	N/A
3D-files, modelling data (Agilent ADS) and footprints on request	

Ordering Information

Single package	Item no. 84091435
----------------	-------------------

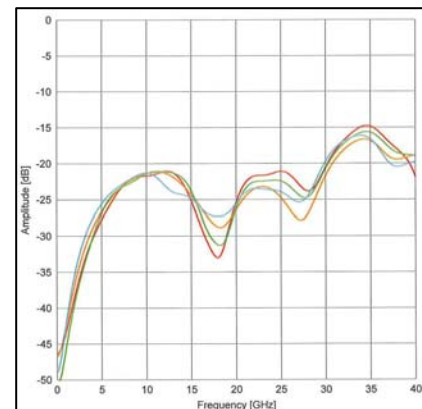

HUBER+SUHNER is certified according to ISO 9001 and ISO 14001

WAIVER!

It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical contained specifications and/or the fitness for any particular purpose. The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.



HUBER+SUHNER AG
RF Technology
9100 Herisau, Switzerland
Phone +41 (0)71 353 41 11
Fax +41 (0)71 353 45 90
www.hubersuhner.com