


Outer shell	: Brass (UNS C38500)	Nickel plated (FS-QQ-N-290A)
Earthing crown	: Cu-Be (UNS C17300)	Nickel plated (FS-QQ-N-290A)
Insulator	: PEEK	-
Female contact	: Bronze (UNS C54400)	Gold plated (ISO 27874)
Ground pin	: Brass (UNS C38500)	Gold plated (ISO 27874)
Other insulating parts	: PPS	-
Other metallic part	: Brass (UNS C38500)	Nickel plated (FS-QQ-N-290A)

A-A cross-section (PCB drilling pattern)

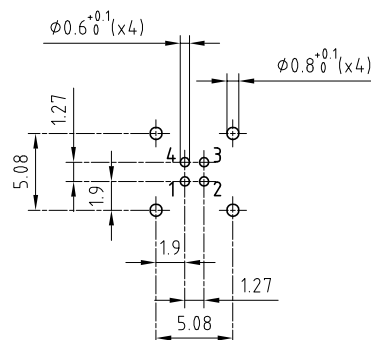

Elbow socket (90°) for PCB , with key (G).
Series 00 , multipole (4)

Echelle —	Dessiné	03.09.2002	OVU / RMO
	Contrôle	05.02.2015	NHA / ATVI
	Modif.	04	05.02.2015/ OVU

ETUDE N° E6295



LEMO

CH-1024 Ecublens

EPG.00.304.HLN