

Double Layer Capacitors

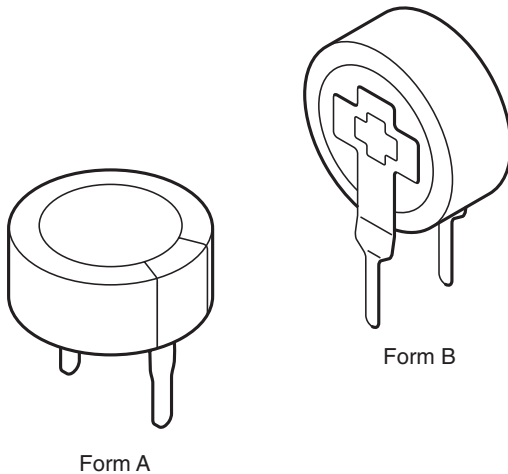


Fig.1 Component outline.

FEATURES

- Polarized capacitor with high charge density, alternative product to rechargeable backup batteries
- Dielectric: electric double layer
- Radial leads, cylindrical case, insulated with a blue vinyl sleeve
- Available in both vertical and low-profile versions
- Unlimited charge and discharge cycle numbers
- No charge-discharge control circuitry and no series resistor necessary
- Maintenance-free, no periodic replacement or service necessary
- Ecologically beneficial (no Cd, no Li).

APPLICATIONS

- Energy storage, for backup of semiconductor memories (CMOS) in all fields of electronics
- Telecommunication, audio-video, EDP
- General industrial, clock and timer systems.

MARKING

The capacitors are marked with the following information:

- Rated capacitance (in F).
- Rated voltage (in V).
- Date code, in accordance with IEC 60062.
- Name of manufacturer.
- Negative terminal identification.
- Upper category temperature (at 85 °C types only).

QUICK REFERENCE DATA				
DESCRIPTION	VALUE			
	STANDARD FORM A	HIGH VOLTAGE FORM A	HIGH TEMPERATURE FORM A	VERTICAL, MINIATURIZED FORM B
Nominal case sizes ($\varnothing D \times L$ in mm)	13 x 7 and 21 x 7.5	13 x 9 and 21 x 9	13 x 9 and 21 x 9	11.5 x 13 (vertical)
Rated capacitance range, C_R	0.047 to 1.0 F	0.047 to 0.68 F	0.047 to 0.68 F	0.047 to 0.33 F
Tolerance on C_R at 20 °C	-20 to +80%			
Rated voltage, U_R	5.5 V	6.3 V	5.5 V	5.5 V
Maximum surge voltage, U_S	6.3 V	7.0 V	6.3 V	6.3 V
Category temperature range	-25 to +70 °C	-25 to +70 °C	-25 to +85 °C	-25 to +70 °C
Useful life at U_R :				
at 85 °C	–	–	1000 hours	–
at 70 °C	1000 hours	1000 hours	2800 hours	1000 hours
at 40 °C	8000 hours	8000 hours	23000 hours	8000 hours
at 25 °C	23000 hours	23000 hours	64000 hours	23000 hours
Shelf life at 0 V	1000 hours at upper category temperature			
Climatic category IEC 60068	25/070/21	25/070/21	25/085/21	25/070/21

SELECTION CHART FOR C_R, U_R AND FORM AT UPPER CATEGORY TEMPERATURE (UCT)				
C _R (F)	FORM	U _R = 5.5 V		U _R = 6.3 V
		UCT = 85 °C	UCT = 70 °C	UCT = 70 °C
0.047	A	13 × 9	13 × 7	13 × 9
	B	–	11.5 × 13	–
0.1	A	13 × 9	13 × 7	13 × 9
	B	–	11.5 × 13	–
0.22	A	–	13 × 7	–
	B	–	11.5 × 13	–
0.33	A	–	13 × 7	–
	B	–	11.5 × 13	–
0.47	A	21 × 9	21 × 7.5	21 × 9
	B	–	–	–
0.68	A	21 × 9	–	21 × 9
	B	–	–	–
1.0	A	–	21 × 7.5	–

DIMENSIONS in millimeters **AND AVAILABLE FORMS**

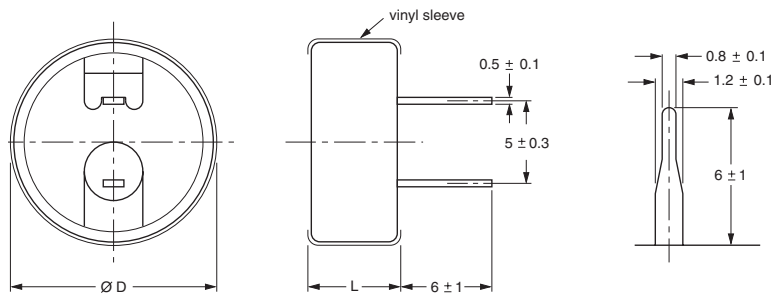


Fig.2 Form A: Low profile.

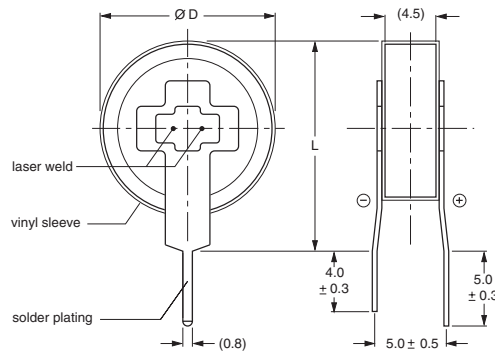


Fig.3 Form B: Vertical.

Table 1

DIMENSIONS in millimeters, MASS AND PACKAGING QUANTITIES						
NOMINAL CASE SIZE ØD × L (mm)	CASE CODE	FORM	ØD _{max}	L _{max}	MASS (g)	PACKAGING QUANTITIES
11.5 × 13	1	B	11.8	13.5	≈1.5	2000
13 × 7	2	A	13.5	7.5	≈2.8	1000
13 × 9	3	A	13.5	9.5	≈3.4	1000
21 × 7.5	4	A	21.5	8.0	≈7.1	500
21 × 9	5	A	21.5	9.5	≈8.8	500

Note

1. Detailed tape dimensions see section 'PACKAGING'.



ELECTRICAL DATA	
SYMBOL	DESCRIPTION
C _R	rated capacitance, tolerance -20/+80%, measured by constant current discharge method
UCT	upper category temperature
I _L	max. leakage current after 30 minutes at U _R
R _I	max. internal resistance at 1 kHz

ORDERING EXAMPLE

Double layer capacitor 196 series
 1.0 F/5.5 V
 Nominal case size: Ø21 × 7.5 mm; Form A
 Catalog number: 2222 196 12105.

Note

Unless otherwise specified, all electrical values in Table 2 apply at T_{amb} = 20 °C, P = 86 to 106 kPa and RH = 45 to 75%.

Table 2

ELECTRICAL DATA AND ORDERING INFORMATION								
U _R (V)	C _R (F)	NOMINAL CASE SIZE ØD × L (mm)	CASE CODE	FORM	UCT (°C)	I _L 30 min. (µA)	R _I 1 kHz(Ω)	CATALOG NUMBER
Standard series								
5.5	0.047	13 × 7	2	A	70	69	120	2222 196 12473
	0.1	13 × 7	2	A	70	100	75	2222 196 12104
	0.22	13 × 7	2	A	70	135	75	2222 196 12224
	0.33	13 × 7	2	A	70	182	75	2222 196 12334
	0.47	21 × 7.5	4	A	70	216	30	2222 196 12474
	1.0	21 × 7.5	4	A	70	315	30	2222 196 12105
High temperature series								
5.5	0.047	13 × 9	3	A	85	69	300	2222 196 22473
	0.1	13 × 9	3	A	85	100	200	2222 196 22104
	0.47	21 × 9	5	A	85	216	50	2222 196 22474
	0.68	21 × 9	5	A	85	260	50	2222 196 22684
Vertical, miniaturized series								
5.5	0.047	11.5 × 13	1	B	70	69	120	2222 196 32473
	0.1	11.5 × 13	1	B	70	100	75	2222 196 32104
	0.22	11.5 × 13	1	B	70	135	75	2222 196 32224
	0.33	11.5 × 13	1	B	70	182	75	2222 196 32334
High voltage series								
6.3	0.047	13 × 9	3	A	70	69	300	2222 196 13473
	0.1	13 × 9	3	A	70	100	200	2222 196 13104
	0.47	21 × 9	5	A	70	216	50	2222 196 13474
	0.68	21 × 9	5	A	70	260	50	2222 196 13684

MEASURING OF CHARACTERISTICS

CAPACITANCE (C)

Capacitance shall be measured by constant current discharge method.

DISCHARGE CURRENT AS A FUNCTION OF RATED CAPACITANCE								
PARAMETER	VALUE							UNIT
Rated capacitance, C _R	0.047	0.1	0.22	0.33	0.47	0.68	1.0	F
Discharge current, I _D	0.1			1.0				mA

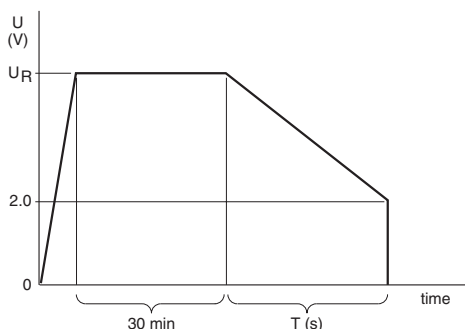


Fig.4 Voltage diagram for capacitance measurement.

Capacitance value C_R is given by discharge current I_D, time T and rated voltage U_R, according to the following equation:

$$C(F) = \frac{I_D(mA) \times 10^{-3} \times T(s)}{U_R(V) - 2}$$

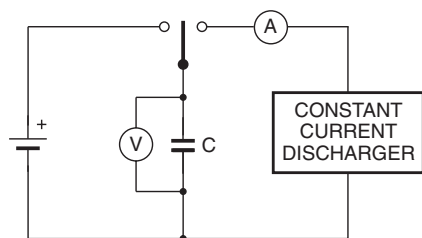


Fig.5 Test circuit for capacitance measurement.

INTERNAL RESISTANCE (R_I) AT 1 KHz

$$R_I(\Omega) = \frac{V_C(V)}{10^{-3}}$$

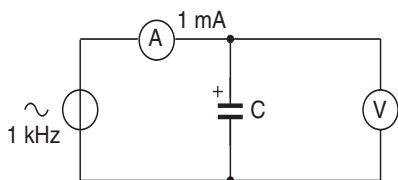


Fig.6 Test circuit for R_I measurement.

LEAKAGE CURRENT (I_L)

Leakage current shall be measured after 30 minutes application of rated voltage U_R:

$$I_L(\mu A) = \frac{V(V)}{10^{-4}}$$


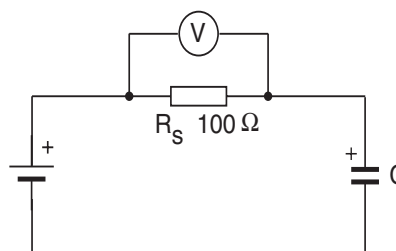


Fig.7 Test circuit for leakage current.

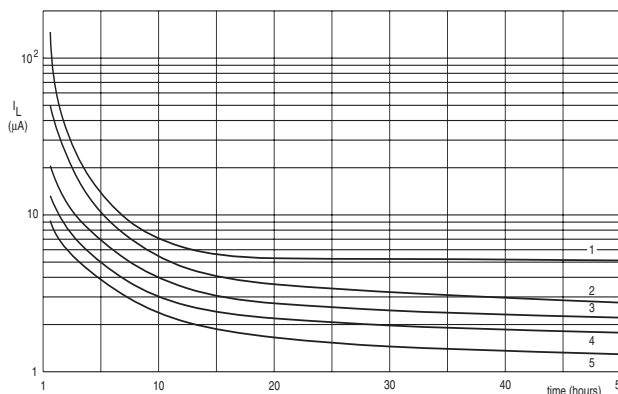


Curve 1: 1.0 F, 5.5 V.
 Curve 2: 0.47 F, 5.5 V.
 Curve 3: 0.22 F, 5.5 V.
 Curve 4: 0.1 F, 5.5 V.
 Curve 5: 0.047 F, 5.5 V.
 R_S = 100 Ω.

Fig.8 Typical leakage current as a function of time.


DISCHARGE CHARACTERISTICS

Backup time of 196 DLC series capacitors depends on minimum memory holding voltage and discharge current (corresponding with the current consumption of the load). For minimum backup times of standard and vertical miniaturized series see Figs 9 and 10 (charging time ≥ 24 hours).

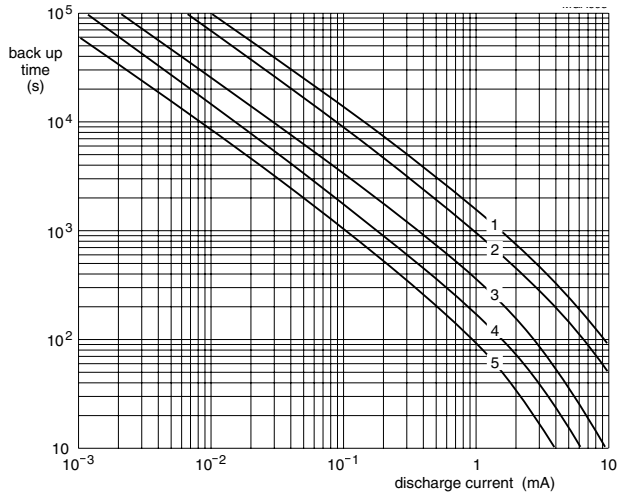

Curve 1: 1.0 F, 5.5 V.
 Curve 2: 0.47 F, 5.5 V.
 Curve 3: 0.22 F, 5.5 V.
 Curve 4: 0.1 F, 5.5 V.
 Curve 5: 0.047 F, 5.5 V.
 Voltage drop from 5.0 to 3.5 V.

Fig.9 Typical backup time as a function of discharge current.

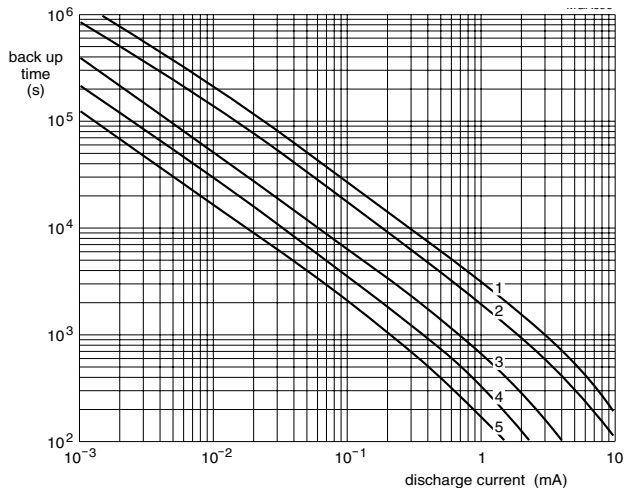

Curve 1: 1.0 F, 5.5 V.
 Curve 2: 0.47 F, 5.5 V.
 Curve 3: 0.22 F, 5.5 V.
 Curve 4: 0.1 F, 5.5 V.
 Curve 5: 0.047 F, 5.5 V.
 Voltage drop from 5.0 to 2.0 V.


Fig.10 Typical backup time as a function of discharge current.

Figure 11 shows the backup time when a 196 DLC capacitor is discharged by a constant resistance (charging time ≥ 24 hours).

The horizontal axis shows the initial value of discharge current if 5 V is connected to the capacitor via a fixed series resistor.

EXAMPLE: 1 μ A CORRESPONDS TO 5 M Ω AND 0.1 μ A CORRESPONDS TO 50 M Ω

The vertical axis shows that period of time during which the voltage drops from 5 to 2 V.

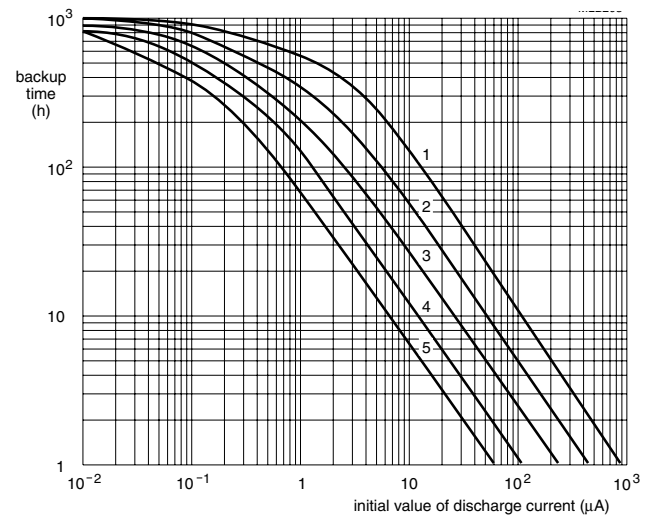

Curve 1: 1.0 F, 5.5 V.
 Curve 2: 0.47 F, 5.5 V.
 Curve 3: 0.22 F, 5.5 V.
 Curve 4: 0.1 F, 5.5 V.
 Curve 5: 0.047 F, 5.5 V.
 Voltage drop from 5.0 to 2.0 V by means of a fixed resistor..

Fig.11 Typical backup time as a function of initial discharge current.

Table 3

TEST PROCEDURES AND REQUIREMENTS for standard and vertical miniaturized series (5.5 V; 70 °C)			
NAME OF TEST	IEC 60384-4/ EN130300 subclause	PROCEDURE (quick reference)	REQUIREMENTS
Robustness of terminations	4.4	tensile strength; application of loading force for 10 seconds: 20 N (standard series) 5 N (vertical miniaturized series)	no breaks
Resistance to soldering heat	4.5	solder bath; 260 °C; 5 seconds	$\Delta C/C$: $\pm 10\%$ R_I and $I_L \leq$ spec. limit
Solderability	4.6	solder bath; 235 °C; 2 seconds	$\geq 75\%$ tinning
Vibration	4.8	10 to 55 Hz; 1.5 mm; 3 directions; 2 hours per direction	$\Delta C/C$: $\pm 10\%$ R_I and $I_L \leq$ spec. limit
Damp heat, steady state	4.12	500 hours at 55 °C; RH 90 to 95%; no voltage applied	$\Delta C/C$: $\pm 30\%$ $R_I \leq 4 \times$ spec. limit $I_L \leq 2 \times$ spec. limit
Endurance	4.13	$T_{amb} = 70$ °C; 5.5 V applied; 1000 hours	$\Delta C/C$: $\pm 30\%$ $R_I \leq 4 \times$ spec. limit $I_L \leq 2 \times$ spec. limit
Storage at upper category temperature	4.17	$T_{amb} = 70$ °C; no voltage applied; 1000 hours	$\Delta C/C$: $\pm 30\%$ $R_I \leq 4 \times$ spec. limit $I_L \leq 2 \times$ spec. limit
Self discharge	–	24 hours storage at room temperature after application of 5 V for 1 hour	remaining voltage: ≥ 4 V
Characteristics at high and low temperature	4.19	step 1: reference measurement at +20 °C of C, R_I and I_L step 2: measurement at –25 °C step 3: measurement at +20 °C step 4: measurement at +70 °C step 5: measurement at +20 °C	$\Delta C/C$: $\pm 30\%$ of +20 °C value $R_I \leq 5 \times$ the +20 °C value $I_L \leq 4 \times$ the +20 °C value

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.