




# SOLID-ELECTROLYTE TANTALUM CAPACITORS

(TANCHIP® SERIES)

## TYPE 267M

Epoxy resin molding chip  
Standard Series

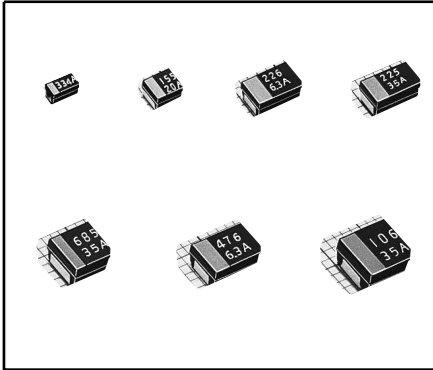

Type 267 is specially designed to SMD, based on our technology of chip tantalum capacitors acquired over many years. Fully-molded construction provides excellent mechanical protection, superior moisture resistance and high soldering heat resistance.

### FEATURES

1. Small size: A case 3.2X1.6mm
2. Suitable for surface mounting.
3. Precise dimensions allow high density packaging. Symmetrical construction of positive and negative terminals provides "Self Alignment".
4. Soldering: 260°C for 10 second by re-flow or flow soldering.
5. #376 series of 267M, which are low ESR(Equivalent Series Resistance) series, were developed to meet recent customer's requirement in high ripple current applications such as DC/DC converter, switching regulator, personal computer, etc.

### NOTIFICATIONS FOR USE

Please inquire of our Sales Department for your suitable soldering or cleaning conditions.

### CAUTIONS

- This capacitor is polarized, do not apply reverse voltage.
- The sum of peak value of AC and DC voltage should not exceed the rated voltage.
- This catalog is designed for providing general information. Please inquire of our Sales Department to confirm specifications prior to use.


### CHARACTERISTICS

ITEM	CHARACTERISTICS
Failure rate level	1%/1000h
Operating temperature range	-55~+85°C to +125°C with voltage derating
Rated voltage	4-6.3-10-16-20-25-35-50VDC
Capacitance range	0.047~220μF
Capacitance tolerance	±10%, ±20%

Available capacitance tolerance ±5%(J) upon request.

### DIMENSIONS

mm

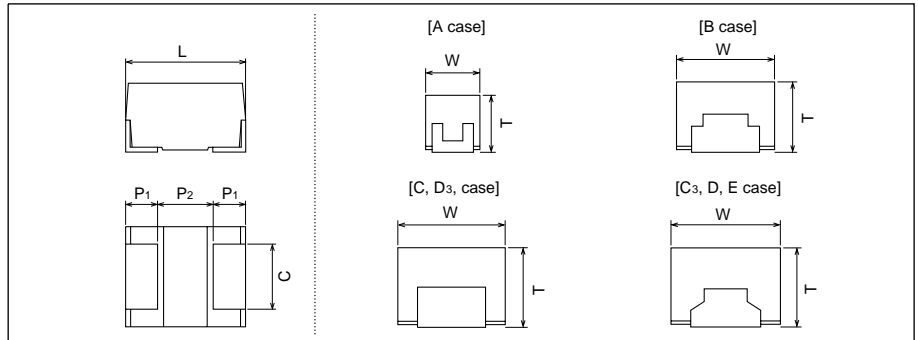

Case code	EIA code	L ± 0.2	W ± 0.2	T ± 0.2	P1 ± 0.2	P2 min.	C ± 0.1
A	3216	3.2	1.6	1.6	0.75	1.4	1.2
B	3528	3.5	2.8	1.9	0.8	1.5	2.2
C	-	5.6	3.3	2.3	1.3	2.8	2.2
C <sub>3</sub>	6032	6.0	3.2	2.5	1.3	3.0	2.2
D	-	5.6	4.6	3.2	1.3	2.8	3.2
D <sub>3</sub>	7343	7.3	4.4	2.8	1.3	4.0	2.4
E	7257	7.3	5.8	3.5	1.3	4.0	3.5

A, B, C<sub>3</sub>, D<sub>3</sub> Case is in conformity with EIA-535BAAC.  
E Case is in conformity with EIA-535BAAD.




# SOLID-ELECTROLYTE TANTALUM CAPACITORS

(TANCHIP® SERIES)


TYPE **267M**  
Epoxy resin molding chip  
Standard Series

## MARKING


(A case)

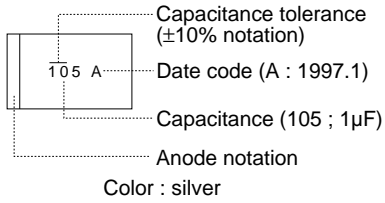

(B case)

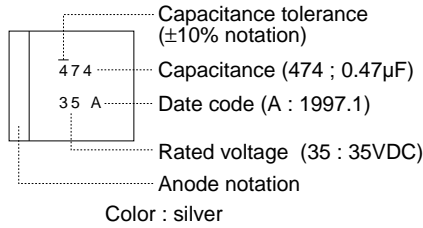

(C, D, C<sub>3</sub>, D<sub>3</sub>, E case)

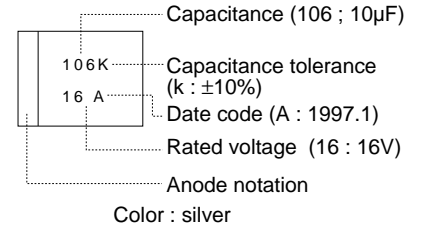

## STANDARD RATINGS

R.V.(VDC) Cap.(µF)	4	6.3	10	16	20	25	35	50
0.047								A
0.068								
0.1							A	A
0.15							A	A, B
0.22							A	B
0.33							A	B
0.47						A	A, B	B, C, C <sub>3</sub>
0.68					A	A	B	C, C <sub>3</sub>
1.0				A	A		B	C, C <sub>3</sub>
1.5			A	A		B	B, C, C <sub>3</sub>	C, C <sub>3</sub> , D, D <sub>3</sub>
2.2		A	A		B	B	C, C <sub>3</sub>	D, D <sub>3</sub>
3.3	A	A		B	B	C <sub>3</sub>	C, C <sub>3</sub> , D <sub>3</sub>	D, D <sub>3</sub>
4.7	A		B	B	C <sub>3</sub>	C, C <sub>3</sub>	C, C <sub>3</sub> , D, D <sub>3</sub>	
6.8		B	B	C <sub>3</sub>	C, C <sub>3</sub>	C, C <sub>3</sub> , D <sub>3</sub>	D, D <sub>3</sub>	
10	B	B	C <sub>3</sub>	C, C <sub>3</sub>	C, C <sub>3</sub>	D, D <sub>3</sub>	D, D <sub>3</sub> , E	
15	B	C <sub>3</sub>	C, C <sub>3</sub>	C, C <sub>3</sub>	D, D <sub>3</sub>	D, D <sub>3</sub>	E	
22	C <sub>3</sub>	C, C <sub>3</sub>	C, C <sub>3</sub>	D, D <sub>3</sub>	D, D <sub>3</sub>	E		
33	C, C <sub>3</sub>	C, C <sub>3</sub>	D, D <sub>3</sub>	D, D <sub>3</sub>	E			
47	C, C <sub>3</sub>	D, D <sub>3</sub>	D, D <sub>3</sub>	E	E			
68	D, D <sub>3</sub>	D, D <sub>3</sub>	E	E				
100	D, D <sub>3</sub>	E	E					
150	E	E						
220	E							

Please inquire of our Sales Department for a selection of suitable case size (dimension, performance, etc.) in same rating.  
Available case size "H" (EIA 7343H) upon request.



# SOLID-ELECTROLYTE TANTALUM CAPACITORS

(TANCHIP® SERIES)

TYPE **267M**  
Epoxy resin molding chip  
Standard Series

## RATINGS AND CATALOG NUMBERS (STANDARD Series)

	Catalog number		cap. (μF)	case code	Max DC Lct. (μA)			Max Dissipation factor				Max ESR(Ω) 100kHz
					25°C	85°C	125°C	-55°C	20°C	85°C	125°C	
Rated voltage 4VDC/Surge voltage 5VDC	267M 4001	335 □ <sup>1</sup> □ <sup>2</sup>	3.3	A	0.4	5	6.3	0.08	0.06	0.06	0.06	7.2
	267M 4001	475 □ <sup>1</sup> □ <sup>2</sup> 533	4.7	A	0.4	5	6.3	0.08	0.06	0.06	0.06	7.3
	267M 4001	106 □ <sup>1</sup> □ <sup>2</sup>	10	B	0.4	5	6.3	0.08	0.06	0.06	0.06	2.9
	267M 4001	156 □ <sup>1</sup> □ <sup>2</sup> 533	15	B	0.5	6	7.5	0.08	0.06	0.06	0.06	2.9
	267M 4001	226 □ <sup>1</sup> □ <sup>2</sup> 720	22	C <sub>3</sub>	0.7	9	11	0.08	0.06	0.06	0.06	0.55
	267M 4001	336 □ <sup>1</sup> □ <sup>2</sup>	33	C	1.1	13	17	0.08	0.06	0.06	0.06	0.55
	267M 4001	336 □ <sup>1</sup> □ <sup>2</sup> 720	33	C <sub>3</sub>	1.1	13	17	0.08	0.06	0.06	0.06	0.55
	267M 4001	476 □ <sup>1</sup> □ <sup>2</sup> 533	47	C	1.5	19	24	0.08	0.06	0.06	0.06	0.55
	267M 4001	476 □ <sup>1</sup> □ <sup>2</sup> 720	47	C <sub>3</sub>	1.5	19	24	0.08	0.06	0.06	0.06	0.55
	267M 4001	686 □ <sup>1</sup> □ <sup>2</sup>	68	D	2.2	27	34	0.08	0.06	0.06	0.06	0.45
	267M 4001	686 □ <sup>1</sup> □ <sup>2</sup> 720	68	D <sub>3</sub>	2.2	27	34	0.08	0.06	0.06	0.06	0.45
	267M 4001	107 □ <sup>1</sup> □ <sup>2</sup>	100	D	3.2	40	50	0.10	0.08	0.08	0.08	0.47
	267M 4001	107 □ <sup>1</sup> □ <sup>2</sup> 720	100	D <sub>3</sub>	3.2	40	50	0.10	0.08	0.08	0.08	0.47
	267M 4001	157 □ <sup>1</sup> □ <sup>2</sup> 720	150	E	4.8	60	75	0.10	0.08	0.08	0.08	0.28
	267M 4001	227 □ <sup>1</sup> □ <sup>2</sup> 720	220	E	7.0	88	110	0.10	0.08	0.08	0.08	0.27
	Rated voltage 6.3VDC/Surge voltage 8VDC	267M 6301	225 □ <sup>1</sup> □ <sup>2</sup>	2.2	A	0.4	5	6.3	0.08	0.06	0.06	0.06
267M 6301		335 □ <sup>1</sup> □ <sup>2</sup> 533	3.3	A	0.4	5	6.3	0.08	0.06	0.06	0.06	7.3
267M 6301		685 □ <sup>1</sup> □ <sup>2</sup>	6.8	B	0.4	5	6.3	0.08	0.06	0.06	0.06	2.9
267M 6301		106 □ <sup>1</sup> □ <sup>2</sup> 533	10	B	0.5	6	7.9	0.08	0.06	0.06	0.06	2.9
267M 6301		156 □ <sup>1</sup> □ <sup>2</sup> 720	15	C <sub>3</sub>	0.8	9	12	0.08	0.06	0.06	0.06	1.15
267M 6301		226 □ <sup>1</sup> □ <sup>2</sup>	22	C	1.1	14	17	0.08	0.06	0.06	0.06	0.55
267M 6301		226 □ <sup>1</sup> □ <sup>2</sup> 720	22	C <sub>3</sub>	1.1	14	17	0.08	0.06	0.06	0.06	0.55
267M 6301		336 □ <sup>1</sup> □ <sup>2</sup> 533	33	C	1.7	21	26	0.08	0.06	0.06	0.06	0.55
267M 6301		336 □ <sup>1</sup> □ <sup>2</sup> 720	33	C <sub>3</sub>	1.7	21	26	0.08	0.06	0.06	0.06	0.55
267M 6301		476 □ <sup>1</sup> □ <sup>2</sup>	47	D	2.4	30	37	0.08	0.06	0.06	0.06	0.45
267M 6301		476 □ <sup>1</sup> □ <sup>2</sup> 720	47	D <sub>3</sub>	2.4	30	37	0.08	0.06	0.06	0.06	0.45
267M 6301		686 □ <sup>1</sup> □ <sup>2</sup>	68	D	3.4	43	54	0.08	0.06	0.06	0.06	0.47
267M 6301		686 □ <sup>1</sup> □ <sup>2</sup> 720	68	D <sub>3</sub>	3.4	43	54	0.08	0.06	0.06	0.06	0.47
267M 6301		107 □ <sup>1</sup> □ <sup>2</sup> 720	100	E	5.0	63	79	0.10	0.08	0.08	0.08	0.28
267M 6301		157 □ <sup>1</sup> □ <sup>2</sup> 720	150	E	7.6	95	118	0.10	0.08	0.08	0.08	0.27
Rated voltage 10VDC/Surge voltage 13VDC		267M 1002	155 □ <sup>1</sup> □ <sup>2</sup>	1.5	A	0.4	5	6.3	0.08	0.06	0.06	0.06
	267M 1002	225 □ <sup>1</sup> □ <sup>2</sup> 533	2.2	A	0.4	5	6.3	0.08	0.06	0.06	0.06	7.3
	267M 1002	475 □ <sup>1</sup> □ <sup>2</sup>	4.7	B	0.4	5	6.3	0.08	0.06	0.06	0.06	2.9
	267M 1002	685 □ <sup>1</sup> □ <sup>2</sup> 533	6.8	B	0.5	7	8.5	0.08	0.06	0.06	0.06	2.9
	267M 1002	106 □ <sup>1</sup> □ <sup>2</sup> 720	10	C <sub>3</sub>	0.8	10	13	0.08	0.06	0.06	0.06	1.15
	267M 1002	156 □ <sup>1</sup> □ <sup>2</sup>	15	C	1.2	15	19	0.08	0.06	0.06	0.06	1.15
	267M 1002	156 □ <sup>1</sup> □ <sup>2</sup> 720	15	C <sub>3</sub>	1.2	15	19	0.08	0.06	0.06	0.06	1.15
	267M 1002	226 □ <sup>1</sup> □ <sup>2</sup> 533	22	C	1.8	22	28	0.08	0.06	0.06	0.06	0.55
	267M 1002	226 □ <sup>1</sup> □ <sup>2</sup> 720	22	C <sub>3</sub>	1.8	22	28	0.08	0.06	0.06	0.06	0.55
	267M 1002	336 □ <sup>1</sup> □ <sup>2</sup>	33	D	2.6	33	41	0.08	0.06	0.06	0.06	0.95
	267M 1002	336 □ <sup>1</sup> □ <sup>2</sup> 720	33	D <sub>3</sub>	2.6	33	41	0.08	0.06	0.06	0.06	0.95
	267M 1002	476 □ <sup>1</sup> □ <sup>2</sup> 533	47	D	3.8	47	59	0.08	0.06	0.06	0.06	0.47
	267M 1002	476 □ <sup>1</sup> □ <sup>2</sup> 720	47	D <sub>3</sub>	3.8	47	59	0.08	0.06	0.06	0.06	0.47
	267M 1002	686 □ <sup>1</sup> □ <sup>2</sup> 720	68	E	5.4	68	85	0.08	0.06	0.06	0.06	0.38
	267M 1002	107 □ <sup>1</sup> □ <sup>2</sup> 720	100	E	8.0	100	125	0.10	0.08	0.08	0.08	0.27

□<sup>1</sup> capacitance tolerance code "K" (±10%) or "M" (±20%)

□<sup>2</sup> taping code "R" ("N") or "L" ("P")

Pull direction "R" ("N") is standard.





# SOLID-ELECTROLYTE TANTALUM CAPACITORS

(TANCHIP® SERIES)

TYPE **267M**  
Epoxy resin molding chip  
Standard Series

## RATINGS AND CATALOG NUMBERS (STANDARD Series)

	Catalog number	cap. (μF)	case code	Max DC Lct. (μA)			Max Dissipation factor				Max ESR(Ω) 100kHz
				25°C	85°C	125°C	-55°C	20°C	85°C	125°C	
Rated voltage 16VDC/Surge voltage 20VDC	267M 1602 105 □ <sup>1</sup> □ <sup>2</sup>	1.0	A	0.4	5	6.3	0.05	0.04	0.04	0.05	7.4
	267M 1602 155 □ <sup>1</sup> □ <sup>2</sup> 533	1.5	A	0.4	5	6.3	0.08	0.06	0.06	0.06	7.4
	267M 1602 335 □ <sup>1</sup> □ <sup>2</sup>	3.3	B	0.4	5	6.3	0.08	0.06	0.06	0.06	2.9
	267M 1602 475 □ <sup>1</sup> □ <sup>2</sup> 533	4.7	B	0.6	8	9.4	0.08	0.06	0.06	0.06	2.9
	267M 1602 685 □ <sup>1</sup> □ <sup>2</sup> 720	6.8	C <sub>3</sub>	0.9	11	14	0.08	0.06	0.06	0.06	1.15
	267M 1602 106 □ <sup>1</sup> □ <sup>2</sup>	10	C	1.3	16	20	0.08	0.06	0.06	0.06	1.17
	267M 1602 106 □ <sup>1</sup> □ <sup>2</sup> 720	10	C <sub>3</sub>	1.3	16	20	0.08	0.06	0.06	0.06	1.17
	267M 1602 156 □ <sup>1</sup> □ <sup>2</sup> 533	15	C	1.9	24	30	0.08	0.06	0.06	0.06	1.17
	267M 1602 156 □ <sup>1</sup> □ <sup>2</sup> 720	15	C <sub>3</sub>	1.9	24	30	0.08	0.06	0.06	0.06	1.17
	267M 1602 226 □ <sup>1</sup> □ <sup>2</sup>	22	D	2.8	35	44	0.08	0.06	0.06	0.06	0.97
	267M 1602 226 □ <sup>1</sup> □ <sup>2</sup> 720	22	D <sub>3</sub>	2.8	35	44	0.08	0.06	0.06	0.06	0.97
	267M 1602 336 □ <sup>1</sup> □ <sup>2</sup> 533	33	D	4.2	53	66	0.08	0.06	0.06	0.06	0.97
	267M 1602 336 □ <sup>1</sup> □ <sup>2</sup> 720	33	D <sub>3</sub>	4.2	53	66	0.08	0.06	0.06	0.06	0.97
	267M 1602 476 □ <sup>1</sup> □ <sup>2</sup> 720	47	E	6.0	75	94	0.08	0.06	0.06	0.06	0.38
	267M 1602 686 □ <sup>1</sup> □ <sup>2</sup> 720	68	E	8.7	109	136	0.08	0.06	0.06	0.08	0.27
	Rated voltage 20VDC/Surge voltage 26VDC	267M 2002 684 □ <sup>1</sup> □ <sup>2</sup>	0.68	A	0.4	5	6.3	0.05	0.04	0.04	0.05
267M 2002 105 □ <sup>1</sup> □ <sup>2</sup> 533		1.0	A	0.4	5	6.3	0.05	0.04	0.04	0.05	7.4
267M 2002 225 □ <sup>1</sup> □ <sup>2</sup>		2.2	B	0.4	5	6.3	0.08	0.06	0.06	0.06	2.9
267M 2002 335 □ <sup>1</sup> □ <sup>2</sup> 533		3.3	B	0.5	7	8.3	0.08	0.06	0.06	0.06	2.9
267M 2002 475 □ <sup>1</sup> □ <sup>2</sup> 720		4.7	C <sub>3</sub>	0.8	9	12	0.08	0.06	0.06	0.06	1.15
267M 2002 685 □ <sup>1</sup> □ <sup>2</sup>		6.8	C	1.1	14	17	0.08	0.06	0.06	0.06	1.17
267M 2002 685 □ <sup>1</sup> □ <sup>2</sup> 720		6.8	C <sub>3</sub>	1.1	14	17	0.08	0.06	0.06	0.06	1.17
267M 2002 106 □ <sup>1</sup> □ <sup>2</sup> 533		10	C	1.6	20	25	0.08	0.06	0.06	0.06	1.17
267M 2002 106 □ <sup>1</sup> □ <sup>2</sup> 720		10	C <sub>3</sub>	1.6	20	25	0.08	0.06	0.06	0.06	1.17
267M 2002 156 □ <sup>1</sup> □ <sup>2</sup>		15	D	2.4	30	38	0.08	0.06	0.06	0.06	0.97
267M 2002 156 □ <sup>1</sup> □ <sup>2</sup> 720		15	D <sub>3</sub>	2.4	30	38	0.08	0.06	0.06	0.06	0.97
267M 2002 226 □ <sup>1</sup> □ <sup>2</sup> 533		22	D	3.5	44	55	0.08	0.06	0.06	0.06	0.97
267M 2002 226 □ <sup>1</sup> □ <sup>2</sup> 720		22	D <sub>3</sub>	3.5	44	55	0.08	0.06	0.06	0.06	0.97
267M 2002 336 □ <sup>1</sup> □ <sup>2</sup> 720		33	E	5.3	66	83	0.08	0.06	0.06	0.06	0.38
267M 2002 476 □ <sup>1</sup> □ <sup>2</sup> 720		47	E	7.5	94	118	0.08	0.06	0.06	0.08	0.27
Rated voltage 25VDC/Surge voltage 32VDC		267M 2502 474 □ <sup>1</sup> □ <sup>2</sup>	0.47	A	0.4	5	6.3	0.05	0.04	0.04	0.05
	267M 2502 684 □ <sup>1</sup> □ <sup>2</sup> 533	0.68	A	0.4	5	6.3	0.05	0.04	0.04	0.05	7.4
	267M 2502 155 □ <sup>1</sup> □ <sup>2</sup>	1.5	B	0.4	5	6.3	0.08	0.06	0.06	0.06	2.9
	267M 2502 225 □ <sup>1</sup> □ <sup>2</sup> 533	2.2	B	0.4	6	6.9	0.08	0.06	0.06	0.06	2.9
	267M 2502 335 □ <sup>1</sup> □ <sup>2</sup> 720	3.3	C <sub>3</sub>	0.7	8	10	0.08	0.06	0.06	0.06	1.18
	267M 2502 475 □ <sup>1</sup> □ <sup>2</sup>	4.7	C	0.9	12	15	0.08	0.06	0.06	0.06	1.18
	267M 2502 475 □ <sup>1</sup> □ <sup>2</sup> 720	4.7	C <sub>3</sub>	0.9	12	15	0.08	0.06	0.06	0.06	1.18
	267M 2502 685 □ <sup>1</sup> □ <sup>2</sup> 533	6.8	C	1.4	17	21	0.08	0.06	0.06	0.06	1.17
	267M 2502 685 □ <sup>1</sup> □ <sup>2</sup> 734	6.8	C <sub>3</sub>	1.4	17	21	0.08	0.06	0.06	0.06	1.17
	267M 2502 685 □ <sup>1</sup> □ <sup>2</sup> 720	6.8	D <sub>3</sub>	1.4	17	21	0.08	0.06	0.06	0.06	0.98
	267M 2502 106 □ <sup>1</sup> □ <sup>2</sup>	10	D	2.0	25	31	0.08	0.06	0.06	0.06	0.98
	267M 2502 106 □ <sup>1</sup> □ <sup>2</sup> 720	10	D <sub>3</sub>	2.0	25	31	0.08	0.06	0.06	0.06	0.98
	267M 2502 156 □ <sup>1</sup> □ <sup>2</sup> 533	15	D	3.0	38	47	0.08	0.06	0.06	0.06	0.98
	267M 2502 156 □ <sup>1</sup> □ <sup>2</sup> 734	15	D <sub>3</sub>	3.0	38	47	0.08	0.06	0.06	0.06	0.98
	267M 2502 226 □ <sup>1</sup> □ <sup>2</sup> 720	22	E	4.4	55	69	0.08	0.06	0.06	0.06	0.39
	Rated voltage 35VDC/Surge voltage 44VDC	267M 3502 104 □ <sup>1</sup> □ <sup>2</sup>	0.1	A	0.4	5	6.3	0.05	0.04	0.04	0.05
267M 3502 154 □ <sup>1</sup> □ <sup>2</sup>		0.15	A	0.4	5	6.3	0.05	0.04	0.04	0.05	9.7
267M 3502 224 □ <sup>1</sup> □ <sup>2</sup>		0.22	A	0.4	5	6.3	0.05	0.04	0.04	0.05	7.4
267M 3502 334 □ <sup>1</sup> □ <sup>2</sup>		0.33	A	0.4	5	6.3	0.05	0.04	0.04	0.05	7.4
267M 3502 474 □ <sup>1</sup> □ <sup>2</sup> 533		0.47	A	0.4	5	6.3	0.05	0.04	0.04	0.05	7.4
267M 3502 474 □ <sup>1</sup> □ <sup>2</sup>		0.47	B	0.4	5	6.3	0.05	0.04	0.04	0.05	2.9
267M 3502 684 □ <sup>1</sup> □ <sup>2</sup>		0.68	B	0.4	5	6.3	0.05	0.04	0.04	0.05	2.9

□<sup>1</sup> capacitance tolerance code "K" (±10%) or "M" (±20%)

□<sup>2</sup> taping code "R" ("N") or "L" ("P")

Pull direction "R" ("N") is standard.





# SOLID-ELECTROLYTE TANTALUM CAPACITORS

(TANCHIP® SERIES)

TYPE **267M**  
Epoxy resin molding chip  
Standard Series

## RATINGS AND CATALOG NUMBERS (STANDARD Series)

	Catalog number	cap. (μF)	case code	Max DC Lct. (μA)			Max Dissipation factor				Max ESR(Ω) 100kHz
				25°C	85°C	125°C	-55°C	20°C	85°C	125°C	
Rated voltage 35VDC/Surge voltage 44VDC	267M 3502 105 □ <sup>1</sup> □ <sup>2</sup>	1.0	B	0.4	5	6.3	0.05	0.04	0.04	0.05	2.9
	267M 3502 155 □ <sup>1</sup> □ <sup>2</sup> 533	1.5	B	0.4	5	6.6	0.08	0.06	0.06	0.06	2.9
	267M 3502 155 □ <sup>1</sup> □ <sup>2</sup>	1.5	C	0.4	5	6.6	0.08	0.06	0.06	0.06	1.18
	267M 3502 155 □ <sup>1</sup> □ <sup>2</sup> 720	1.5	C <sub>3</sub>	0.4	5	6.6	0.08	0.06	0.06	0.06	1.18
	267M 3502 225 □ <sup>1</sup> □ <sup>2</sup>	2.2	C	0.6	8	9.6	0.08	0.06	0.06	0.06	1.18
	267M 3502 225 □ <sup>1</sup> □ <sup>2</sup> 720	2.2	C <sub>3</sub>	0.6	8	9.6	0.08	0.06	0.06	0.06	1.18
	267M 3502 335 □ <sup>1</sup> □ <sup>2</sup>	3.3	C	0.9	12	14	0.08	0.06	0.06	0.06	1.18
	267M 3502 335 □ <sup>1</sup> □ <sup>2</sup> 734	3.3	C <sub>3</sub>	0.9	12	14	0.08	0.06	0.06	0.06	1.18
	267M 3502 335 □ <sup>1</sup> □ <sup>2</sup> 720	3.3	D <sub>3</sub>	0.9	12	14	0.08	0.06	0.06	0.06	0.98
	267M 3502 475 □ <sup>1</sup> □ <sup>2</sup> 533	4.7	C	1.3	16	21	0.08	0.06	0.06	0.06	1.17
	267M 3502 475 □ <sup>1</sup> □ <sup>2</sup> 734	4.7	C <sub>3</sub>	1.3	16	21	0.08	0.06	0.06	0.06	1.17
	267M 3502 475 □ <sup>1</sup> □ <sup>2</sup>	4.7	D	1.3	16	21	0.08	0.06	0.06	0.06	0.98
	267M 3502 475 □ <sup>1</sup> □ <sup>2</sup> 720	4.7	D <sub>3</sub>	1.3	16	21	0.08	0.06	0.06	0.06	0.98
	267M 3502 685 □ <sup>1</sup> □ <sup>2</sup>	6.8	D	1.9	24	30	0.08	0.06	0.06	0.06	0.98
	267M 3502 685 □ <sup>1</sup> □ <sup>2</sup> 720	6.8	D <sub>3</sub>	1.9	24	30	0.08	0.06	0.06	0.06	0.98
	267M 3502 106 □ <sup>1</sup> □ <sup>2</sup> 533	10	D	2.8	35	44	0.08	0.06	0.06	0.06	0.98
	267M 3502 106 □ <sup>1</sup> □ <sup>2</sup> 734	10	D <sub>3</sub>	2.8	35	44	0.08	0.06	0.06	0.06	0.98
	267M 3502 106 □ <sup>1</sup> □ <sup>2</sup> 720	10	E	2.8	35	44	0.08	0.06	0.06	0.06	0.38
	267M 3502 156 □ <sup>1</sup> □ <sup>2</sup> 720	15	E	4.2	55	66	0.08	0.06	0.06	0.06	0.39
	Rated voltage 50VDC/Surge voltage 63VDC	267M 5002 473 □ <sup>1</sup> □ <sup>2</sup>	0.047	A	0.4	5	6.3	0.05	0.04	0.04	0.05
267M 5002 104 □ <sup>1</sup> □ <sup>2</sup>		0.1	A	0.4	5	6.3	0.05	0.04	0.04	0.05	10
267M 5002 154 □ <sup>1</sup> □ <sup>2</sup> 533		0.15	A	0.4	5	6.3	0.05	0.04	0.04	0.05	10
267M 5002 154 □ <sup>1</sup> □ <sup>2</sup>		0.15	B	0.4	5	6.3	0.05	0.04	0.04	0.05	5
267M 5002 224 □ <sup>1</sup> □ <sup>2</sup>		0.22	B	0.4	5	6.3	0.05	0.04	0.04	0.05	5
267M 5002 334 □ <sup>1</sup> □ <sup>2</sup>		0.33	B	0.4	5	6.3	0.05	0.04	0.04	0.05	3
267M 5002 474 □ <sup>1</sup> □ <sup>2</sup> 533		0.47	B	0.4	5	6.3	0.05	0.04	0.04	0.05	3
267M 5002 474 □ <sup>1</sup> □ <sup>2</sup>		0.47	C	0.4	5	6.3	0.05	0.04	0.04	0.05	3
267M 5002 474 □ <sup>1</sup> □ <sup>2</sup> 720		0.47	C <sub>3</sub>	0.4	5	6.3	0.05	0.04	0.04	0.05	3
267M 5002 684 □ <sup>1</sup> □ <sup>2</sup>		0.68	C	0.4	5	6.3	0.05	0.04	0.04	0.05	3
267M 5002 684 □ <sup>1</sup> □ <sup>2</sup> 720		0.68	C <sub>3</sub>	0.4	5	6.3	0.05	0.04	0.04	0.05	3
267M 5002 105 □ <sup>1</sup> □ <sup>2</sup>		1.0	C	0.4	5	6.3	0.05	0.04	0.04	0.05	3
267M 5002 105 □ <sup>1</sup> □ <sup>2</sup> 720		1.0	C <sub>3</sub>	0.4	5	6.3	0.05	0.04	0.04	0.05	3
267M 5002 155 □ <sup>1</sup> □ <sup>2</sup> 533		1.5	C	0.6	8	9.4	0.08	0.06	0.06	0.06	1.2
267M 5002 155 □ <sup>1</sup> □ <sup>2</sup> 734		1.5	C <sub>3</sub>	0.6	8	9.4	0.08	0.06	0.06	0.06	1.2
267M 5002 155 □ <sup>1</sup> □ <sup>2</sup>		1.5	D	0.6	8	9.4	0.08	0.06	0.06	0.06	1.5
267M 5002 155 □ <sup>1</sup> □ <sup>2</sup> 720		1.5	D <sub>3</sub>	0.6	8	9.4	0.08	0.06	0.06	0.06	1.5
267M 5002 225 □ <sup>1</sup> □ <sup>2</sup>		2.2	D	0.9	11	14	0.08	0.06	0.06	0.08	1.5
267M 5002 225 □ <sup>1</sup> □ <sup>2</sup> 720		2.2	D <sub>3</sub>	0.9	11	14	0.08	0.06	0.06	0.06	1.5
267M 5002 335 □ <sup>1</sup> □ <sup>2</sup> 533		3.3	D	1.3	17	21	0.08	0.06	0.06	0.08	1.0
267M 5002 335 □ <sup>1</sup> □ <sup>2</sup> 734	3.3	D <sub>3</sub>	1.3	17	21	0.08	0.06	0.06	0.06	1.0	

□<sup>1</sup> capacitance tolerance code "K" (±10%) or "M" (±20%)

□<sup>2</sup> taping code "R" ("N") or "L" ("P")

Pull direction "R" ("N") is standard.





# SOLID-ELECTROLYTE TANTALUM CAPACITORS

(TANCHIP® SERIES)

TYPE **267M**  
Epoxy resin molding chip  
Low ESR Series

## ⚠ CAUTIONS

- This capacitor is polarized, do not apply reverse voltage.
- The sum of peak value of AC and DC voltage should not exceed the rated voltage.
- This catalog is designed for providing general information. Please inquire of our Sales Department to confirm specifications prior to use.

## RATINGS AND CATALOG NUMBERS (Low ESR Series)

	Catalog number		cap. (μF)	case code	Max DC Lct. (μA)			Max Dissipation factor				Max ESR(Ω) 100kHz	
					25°C	85°C	125°C	-55°C	20°C	85°C	125°C		
Rated voltage 4VDC/Surge voltage 5VDC	267M 4001	335 □ <sup>1</sup> □ <sup>2</sup> 376	3.3	A	0.4	5	6.3	0.08	0.06	0.06	0.06	4.2	
	267M 4001	475 □ <sup>1</sup> □ <sup>2</sup> 378	4.7	A	0.4	5	6.3	0.08	0.06	0.06	0.06	3.8	
	267M 4001	106 □ <sup>1</sup> □ <sup>2</sup> 376	10	B	0.4	5	6.3	0.08	0.06	0.06	0.06	2.2	
	267M 4001	156 □ <sup>1</sup> □ <sup>2</sup> 378	15	B	0.5	6	7.5	0.08	0.06	0.06	0.06	2.2	
	267M 4001	226 □ <sup>1</sup> □ <sup>2</sup> 377	22	C <sub>3</sub>	0.7	9	11	0.08	0.06	0.06	0.06	0.5	
	267M 4001	336 □ <sup>1</sup> □ <sup>2</sup> 376	33	C	1.1	13	17	0.08	0.06	0.06	0.06	0.5	
	267M 4001	336 □ <sup>1</sup> □ <sup>2</sup> 377	33	C <sub>3</sub>	1.1	13	17	0.08	0.06	0.06	0.06	0.5	
	267M 4001	476 □ <sup>1</sup> □ <sup>2</sup> 378	47	C	1.5	19	24	0.08	0.06	0.06	0.06	0.45	
	267M 4001	476 □ <sup>1</sup> □ <sup>2</sup> 377	47	C <sub>3</sub>	1.5	19	24	0.08	0.06	0.06	0.06	0.45	
	267M 4001	686 □ <sup>1</sup> □ <sup>2</sup> 376	68	D	2.2	27	34	0.08	0.06	0.06	0.06	0.35	
	267M 4001	686 □ <sup>1</sup> □ <sup>2</sup> 377	68	D <sub>3</sub>	2.2	27	34	0.08	0.06	0.06	0.06	0.35	
	267M 4001	107 □ <sup>1</sup> □ <sup>2</sup> 376	100	D	3.2	40	50	0.10	0.08	0.08	0.08	0.37	
	267M 4001	107 □ <sup>1</sup> □ <sup>2</sup> 377	100	D <sub>3</sub>	3.2	40	50	0.10	0.08	0.08	0.08	0.37	
	267M 4001	157 □ <sup>1</sup> □ <sup>2</sup> 377	150	E	4.8	60	75	0.10	0.08	0.08	0.08	0.25	
	267M 4001	227 □ <sup>1</sup> □ <sup>2</sup> 377	220	E	7.0	88	110	0.10	0.08	0.08	0.08	0.22	
	Rated voltage 6.3VDC/Surge voltage 8VDC	267M 6301	225 □ <sup>1</sup> □ <sup>2</sup> 376	2.2	A	0.4	5	6.3	0.08	0.06	0.06	0.06	4.2
		267M 6301	335 □ <sup>1</sup> □ <sup>2</sup> 378	3.3	A	0.4	5	6.3	0.08	0.06	0.06	0.06	3.8
		267M 6301	685 □ <sup>1</sup> □ <sup>2</sup> 376	6.8	B	0.4	5	6.3	0.08	0.06	0.06	0.06	2.2
267M 6301		106 □ <sup>1</sup> □ <sup>2</sup> 378	10	B	0.5	6	7.9	0.08	0.06	0.06	0.06	2.2	
267M 6301		156 □ <sup>1</sup> □ <sup>2</sup> 377	15	C <sub>3</sub>	0.8	9	12	0.08	0.06	0.06	0.06	0.6	
267M 6301		226 □ <sup>1</sup> □ <sup>2</sup> 376	22	C	1.1	14	17	0.08	0.06	0.06	0.06	0.5	
267M 6301		226 □ <sup>1</sup> □ <sup>2</sup> 377	22	C <sub>3</sub>	1.1	14	17	0.08	0.06	0.06	0.06	0.5	
267M 6301		336 □ <sup>1</sup> □ <sup>2</sup> 378	33	C	1.7	21	26	0.08	0.06	0.06	0.06	0.45	
267M 6301		336 □ <sup>1</sup> □ <sup>2</sup> 377	33	C <sub>3</sub>	1.7	21	26	0.08	0.06	0.06	0.06	0.45	
267M 6301		476 □ <sup>1</sup> □ <sup>2</sup> 376	47	D	2.4	30	37	0.08	0.06	0.06	0.06	0.35	
267M 6301		476 □ <sup>1</sup> □ <sup>2</sup> 377	47	D <sub>3</sub>	2.4	30	37	0.08	0.06	0.06	0.06	0.35	
267M 6301		686 □ <sup>1</sup> □ <sup>2</sup> 376	68	D	3.4	43	54	0.08	0.06	0.06	0.06	0.37	
267M 6301		686 □ <sup>1</sup> □ <sup>2</sup> 377	68	D <sub>3</sub>	3.4	43	54	0.08	0.06	0.06	0.06	0.37	
267M 6301		107 □ <sup>1</sup> □ <sup>2</sup> 377	100	E	5.0	63	79	0.10	0.08	0.08	0.08	0.25	
267M 6301		157 □ <sup>1</sup> □ <sup>2</sup> 377	150	E	7.6	95	118	0.10	0.08	0.08	0.08	0.22	
Rated voltage 10VDC/Surge voltage 13VDC		267M 1002	155 □ <sup>1</sup> □ <sup>2</sup> 376	1.5	A	0.4	5	6.3	0.08	0.06	0.06	0.06	4.2
		267M 1002	225 □ <sup>1</sup> □ <sup>2</sup> 378	2.2	A	0.4	5	6.3	0.08	0.06	0.06	0.06	3.8
		267M 1002	475 □ <sup>1</sup> □ <sup>2</sup> 376	4.7	B	0.4	5	6.3	0.08	0.06	0.06	0.06	2.2
	267M 1002	685 □ <sup>1</sup> □ <sup>2</sup> 378	6.8	B	0.5	7	8.5	0.08	0.06	0.06	0.06	2.2	
	267M 1002	106 □ <sup>1</sup> □ <sup>2</sup> 377	10	C <sub>3</sub>	0.8	10	13	0.08	0.06	0.06	0.06	0.6	
	267M 1002	156 □ <sup>1</sup> □ <sup>2</sup> 376	15	C	1.2	15	19	0.08	0.06	0.06	0.06	0.6	
	267M 1002	156 □ <sup>1</sup> □ <sup>2</sup> 377	15	C <sub>3</sub>	1.2	15	19	0.08	0.06	0.06	0.06	0.6	
	267M 1002	226 □ <sup>1</sup> □ <sup>2</sup> 378	22	C	1.8	22	28	0.08	0.06	0.06	0.06	0.45	
	267M 1002	226 □ <sup>1</sup> □ <sup>2</sup> 377	22	C <sub>3</sub>	1.8	22	28	0.08	0.06	0.06	0.06	0.45	
	267M 1002	336 □ <sup>1</sup> □ <sup>2</sup> 376	33	D	2.6	33	41	0.08	0.06	0.06	0.06	0.35	
	267M 1002	336 □ <sup>1</sup> □ <sup>2</sup> 377	33	D <sub>3</sub>	2.6	33	41	0.08	0.06	0.06	0.06	0.35	
	267M 1002	476 □ <sup>1</sup> □ <sup>2</sup> 378	47	D	3.8	47	59	0.08	0.06	0.06	0.06	0.37	
	267M 1002	476 □ <sup>1</sup> □ <sup>2</sup> 377	47	D <sub>3</sub>	3.8	47	59	0.08	0.06	0.06	0.06	0.37	
	267M 1002	686 □ <sup>1</sup> □ <sup>2</sup> 377	68	E	5.4	68	85	0.08	0.06	0.06	0.06	0.25	
	267M 1002	107 □ <sup>1</sup> □ <sup>2</sup> 377	100	E	8.0	100	125	0.10	0.08	0.08	0.08	0.22	

□<sup>1</sup> capacitance tolerance code "K" (±10%) or "M" (±20%)

□<sup>2</sup> taping code "R" ("N") or "L" ("P")

Pull direction "R" ("N") is standard.





# SOLID-ELECTROLYTE TANTALUM CAPACITORS

(TANCHIP® SERIES)

TYPE **267M**  
Epoxy resin molding chip  
Low ESR Series

## RATINGS AND CATALOG NUMBERS (Low ESR Series)

	Catalog number	cap. (μF)	case code	Max DC Lct. (μA)			Max Dissipation factor				Max ESR(Ω) 100kHz
				25°C	85°C	125°C	-55°C	20°C	85°C	125°C	
Rated voltage 16VDC/Surge voltage 20VDC	267M 1602 105 □ <sup>1</sup> □ <sup>2</sup> 376	1.0	A	0.4	5	6.3	0.05	0.04	0.04	0.05	4.4
	267M 1602 155 □ <sup>1</sup> □ <sup>2</sup> 378	1.5	A	0.4	5	6.3	0.08	0.06	0.06	0.06	3.9
	267M 1602 335 □ <sup>1</sup> □ <sup>2</sup> 376	3.3	B	0.4	5	6.6	0.08	0.06	0.06	0.06	2.2
	267M 1602 475 □ <sup>1</sup> □ <sup>2</sup> 378	4.7	B	0.6	8	9.4	0.08	0.06	0.06	0.06	2.2
	267M 1602 685 □ <sup>1</sup> □ <sup>2</sup> 377	6.8	C <sub>3</sub>	0.9	11	14	0.08	0.06	0.06	0.06	0.6
	267M 1602 106 □ <sup>1</sup> □ <sup>2</sup> 376	10	C	1.3	16	20	0.08	0.06	0.06	0.06	0.62
	267M 1602 106 □ <sup>1</sup> □ <sup>2</sup> 377	10	C <sub>3</sub>	1.3	16	20	0.08	0.06	0.06	0.06	0.62
	267M 1602 156 □ <sup>1</sup> □ <sup>2</sup> 378	15	C	1.9	24	30	0.08	0.06	0.06	0.06	0.47
	267M 1602 156 □ <sup>1</sup> □ <sup>2</sup> 377	15	C <sub>3</sub>	1.9	24	30	0.08	0.06	0.06	0.06	0.47
	267M 1602 226 □ <sup>1</sup> □ <sup>2</sup> 376	22	D	2.8	35	44	0.08	0.06	0.06	0.06	0.37
	267M 1602 226 □ <sup>1</sup> □ <sup>2</sup> 377	22	D <sub>3</sub>	2.8	35	44	0.08	0.06	0.06	0.06	0.37
	267M 1602 336 □ <sup>1</sup> □ <sup>2</sup> 378	33	D	4.2	53	66	0.08	0.06	0.06	0.06	0.37
	267M 1602 336 □ <sup>1</sup> □ <sup>2</sup> 377	33	D <sub>3</sub>	4.2	53	66	0.08	0.06	0.06	0.06	0.37
	267M 1602 476 □ <sup>1</sup> □ <sup>2</sup> 377	47	E	6.0	75	94	0.08	0.06	0.06	0.06	0.25
	267M 1602 686 □ <sup>1</sup> □ <sup>2</sup> 377	68	E	8.7	109	136	0.08	0.06	0.06	0.08	0.22
	Rated voltage 20VDC/Surge voltage 26VDC	267M 2002 684 □ <sup>1</sup> □ <sup>2</sup> 376	0.68	A	0.4	5	6.3	0.05	0.04	0.04	0.05
267M 2002 105 □ <sup>1</sup> □ <sup>2</sup> 378		1.0	A	0.4	5	6.3	0.05	0.04	0.04	0.05	3.9
267M 2002 225 □ <sup>1</sup> □ <sup>2</sup> 376		2.2	B	0.4	5	6.3	0.08	0.06	0.06	0.06	2.2
267M 2002 335 □ <sup>1</sup> □ <sup>2</sup> 378		3.3	B	0.5	7	8.3	0.08	0.06	0.06	0.06	2.2
267M 2002 475 □ <sup>1</sup> □ <sup>2</sup> 377		4.7	C <sub>3</sub>	0.8	9	12	0.08	0.06	0.06	0.06	0.6
267M 2002 685 □ <sup>1</sup> □ <sup>2</sup> 376		6.8	C	1.1	14	17	0.08	0.06	0.06	0.06	0.62
267M 2002 685 □ <sup>1</sup> □ <sup>2</sup> 377		6.8	C <sub>3</sub>	1.1	14	17	0.08	0.06	0.06	0.06	0.62
267M 2002 106 □ <sup>1</sup> □ <sup>2</sup> 378		10	C	1.6	20	25	0.08	0.06	0.06	0.06	0.47
267M 2002 106 □ <sup>1</sup> □ <sup>2</sup> 377		10	C <sub>3</sub>	1.6	20	25	0.08	0.06	0.06	0.06	0.47
267M 2002 156 □ <sup>1</sup> □ <sup>2</sup> 376		15	D	2.4	30	38	0.08	0.06	0.06	0.06	0.37
267M 2002 156 □ <sup>1</sup> □ <sup>2</sup> 377		15	D <sub>3</sub>	2.4	30	38	0.08	0.06	0.06	0.06	0.37
267M 2002 226 □ <sup>1</sup> □ <sup>2</sup> 378		22	D	3.5	44	55	0.08	0.06	0.06	0.06	0.37
267M 2002 226 □ <sup>1</sup> □ <sup>2</sup> 377		22	D <sub>3</sub>	3.5	44	55	0.08	0.06	0.06	0.06	0.37
267M 2002 336 □ <sup>1</sup> □ <sup>2</sup> 377		33	E	5.3	66	83	0.08	0.06	0.06	0.06	0.25
267M 2002 476 □ <sup>1</sup> □ <sup>2</sup> 377		47	E	7.5	94	118	0.08	0.06	0.06	0.08	0.22
Rated voltage 25VDC/Surge voltage 32VDC		267M 2502 474 □ <sup>1</sup> □ <sup>2</sup> 376	0.47	A	0.4	5	6.3	0.05	0.04	0.04	0.05
	267M 2502 684 □ <sup>1</sup> □ <sup>2</sup> 378	0.68	A	0.4	5	6.3	0.05	0.04	0.04	0.05	4.4
	267M 2502 155 □ <sup>1</sup> □ <sup>2</sup> 376	1.5	B	0.4	5	6.3	0.08	0.06	0.06	0.06	2.2
	267M 2502 225 □ <sup>1</sup> □ <sup>2</sup> 378	2.2	B	0.4	6	6.9	0.08	0.06	0.06	0.06	2.2
	267M 2502 335 □ <sup>1</sup> □ <sup>2</sup> 377	3.3	C <sub>3</sub>	0.7	8	10	0.08	0.06	0.06	0.06	0.68
	267M 2502 475 □ <sup>1</sup> □ <sup>2</sup> 376	4.7	C	0.9	12	15	0.08	0.06	0.06	0.06	0.68
	267M 2502 475 □ <sup>1</sup> □ <sup>2</sup> 377	4.7	C <sub>3</sub>	0.9	12	15	0.08	0.06	0.06	0.06	0.68
	267M 2502 685 □ <sup>1</sup> □ <sup>2</sup> 378	6.8	C	1.4	17	21	0.08	0.06	0.06	0.06	0.82
	267M 2502 685 □ <sup>1</sup> □ <sup>2</sup> 379	6.8	C <sub>3</sub>	1.4	17	21	0.08	0.06	0.06	0.06	0.82
	267M 2502 685 □ <sup>1</sup> □ <sup>2</sup> 377	6.8	D <sub>3</sub>	1.4	17	21	0.08	0.06	0.06	0.06	0.58
	267M 2502 106 □ <sup>1</sup> □ <sup>2</sup> 376	10	D	2.0	25	31	0.08	0.06	0.06	0.06	0.44
	267M 2502 106 □ <sup>1</sup> □ <sup>2</sup> 377	10	D <sub>3</sub>	2.0	25	31	0.08	0.06	0.06	0.06	0.44
	267M 2502 156 □ <sup>1</sup> □ <sup>2</sup> 378	15	D	3.0	38	47	0.08	0.06	0.06	0.06	0.68
	267M 2502 156 □ <sup>1</sup> □ <sup>2</sup> 379	15	D <sub>3</sub>	3.0	38	47	0.08	0.06	0.06	0.06	0.68
	267M 2502 226 □ <sup>1</sup> □ <sup>2</sup> 377	22	E	4.4	55	69	0.08	0.06	0.06	0.06	0.26

□<sup>1</sup> capacitance tolerance code "K" (±10%) or "M" (±20%)

□<sup>2</sup> taping code "R" ("N") or "L" ("P")

Pull direction "R" ("N") is standard.





# SOLID-ELECTROLYTE TANTALUM CAPACITORS

(TANCHIP® SERIES)

TYPE **267M**  
Epoxy resin molding chip  
Low ESR Series

## RATINGS AND CATALOG NUMBERS (Low ESR Series)

Catalog number	cap. (μF)	case code	Max DC Lct. (μA)			Max Dissipation factor				Max ESR(Ω) 100kHz	
			25°C	85°C	125°C	-55°C	20°C	85°C	125°C		
Rated voltage 35VDC/Surge voltage 44VDC											
267M 3502 104 □ <sup>1</sup> □ <sup>2</sup> 376	0.1	A	0.4	5	6.3	0.05	0.04	0.04	0.05	6.7	
267M 3502 154 □ <sup>1</sup> □ <sup>2</sup> 376	0.15	A	0.4	5	6.3	0.05	0.04	0.04	0.05	5.7	
267M 3502 224 □ <sup>1</sup> □ <sup>2</sup> 376	0.22	A	0.4	5	6.3	0.05	0.04	0.04	0.05	5.7	
267M 3502 334 □ <sup>1</sup> □ <sup>2</sup> 376	0.33	A	0.4	5	6.3	0.05	0.04	0.04	0.05	4.9	
267M 3502 474 □ <sup>1</sup> □ <sup>2</sup> 378	0.47	A	0.4	5	6.3	0.05	0.04	0.04	0.05	4.4	
267M 3502 474 □ <sup>1</sup> □ <sup>2</sup> 376	0.47	B	0.4	5	6.3	0.05	0.04	0.04	0.05	2.2	
267M 3502 684 □ <sup>1</sup> □ <sup>2</sup> 376	0.68	B	0.4	5	6.3	0.05	0.04	0.04	0.05	2.2	
267M 3502 105 □ <sup>1</sup> □ <sup>2</sup> 376	1.0	B	0.4	5	6.3	0.05	0.04	0.04	0.05	2.2	
267M 3502 155 □ <sup>1</sup> □ <sup>2</sup> 378	1.5	B	0.4	5	6.6	0.08	0.06	0.06	0.06	2.2	
267M 3502 155 □ <sup>1</sup> □ <sup>2</sup> 376	1.5	C	0.4	5	6.6	0.08	0.06	0.06	0.06	0.83	
267M 3502 155 □ <sup>1</sup> □ <sup>2</sup> 377	1.5	C <sub>3</sub>	0.4	5	6.6	0.08	0.06	0.06	0.06	0.83	
267M 3502 225 □ <sup>1</sup> □ <sup>2</sup> 376	2.2	C	0.6	8	9.6	0.08	0.06	0.06	0.06	0.68	
267M 3502 225 □ <sup>1</sup> □ <sup>2</sup> 377	2.2	C <sub>3</sub>	0.6	8	9.6	0.08	0.06	0.06	0.06	0.68	
267M 3502 335 □ <sup>1</sup> □ <sup>2</sup> 376	3.3	C	0.9	12	14	0.08	0.06	0.06	0.06	0.68	
267M 3502 335 □ <sup>1</sup> □ <sup>2</sup> 379	3.3	C <sub>3</sub>	0.9	12	14	0.08	0.06	0.06	0.06	0.68	
267M 3502 335 □ <sup>1</sup> □ <sup>2</sup> 377	3.3	D <sub>3</sub>	0.9	12	14	0.08	0.06	0.06	0.06	0.58	
267M 3502 475 □ <sup>1</sup> □ <sup>2</sup> 378	4.7	C	1.3	16	21	0.08	0.06	0.06	0.06	0.82	
267M 3502 475 □ <sup>1</sup> □ <sup>2</sup> 379	4.7	C <sub>3</sub>	1.3	16	21	0.08	0.06	0.06	0.06	0.82	
267M 3502 475 □ <sup>1</sup> □ <sup>2</sup> 376	4.7	D	1.3	16	21	0.08	0.06	0.06	0.06	0.58	
267M 3502 475 □ <sup>1</sup> □ <sup>2</sup> 377	4.7	D <sub>3</sub>	1.3	16	21	0.08	0.06	0.06	0.06	0.58	
267M 3502 685 □ <sup>1</sup> □ <sup>2</sup> 376	6.8	D	1.9	24	30	0.08	0.06	0.06	0.06	0.44	
267M 3502 685 □ <sup>1</sup> □ <sup>2</sup> 377	6.8	D <sub>3</sub>	1.9	24	30	0.08	0.06	0.06	0.06	0.44	
267M 3502 106 □ <sup>1</sup> □ <sup>2</sup> 378	10	D	2.8	35	44	0.08	0.06	0.06	0.06	0.68	
267M 3502 106 □ <sup>1</sup> □ <sup>2</sup> 379	10	D <sub>3</sub>	2.8	35	44	0.08	0.06	0.06	0.06	0.68	
267M 3502 106 □ <sup>1</sup> □ <sup>2</sup> 377	10	E	2.8	35	44	0.08	0.06	0.06	0.06	0.32	
267M 3502 156 □ <sup>1</sup> □ <sup>2</sup> 377	15	E	4.2	55	66	0.08	0.06	0.06	0.06	0.26	

□<sup>1</sup> capacitance tolerance code "K" (±10%) or "M" (±20%)  
 □<sup>2</sup> taping code "R" ("N") or "L" ("P")  
 Pull direction "R" ("N") is standard.