


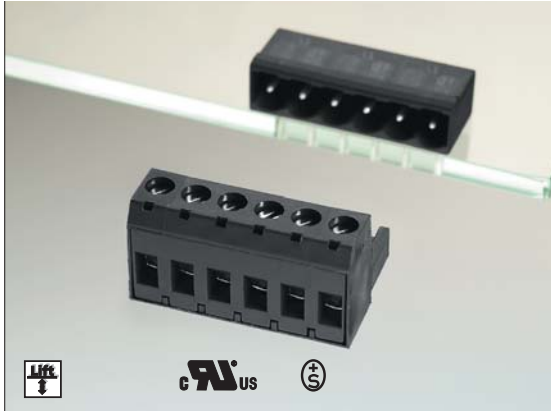

Headers

to **Type 349** and **Type 350**

	Type 176	page 140
	Type 177	page 133
	Type 270	page 134
	Type 274	page 134
	Type 276	page 141
	Type 278	page 135
	Type 280	page 141
	Type 319	page 131
	Type 320	page 132
	Type 329	page 138
	Type 330	page 139

Accessories

for **Type 349** and **Type 350**
(only in combination with
headers type 176, 177, 319,
320, 329 and 330)

coding set

700025 Seite 206

Type 349

Screw type terminal block, pluggable, centerline 5 mm / 0.197 inches, wire entry parallel to plug direction, lift system, contact system with integrated wire protection

Technical Data

UL V / A / AWG 300 / 16 / 28 - 12

0.08 - 2.5 mm² 250 V / 4 kV / 12 A

Insulation co-ordination according to EN 60664-1

Clearance and creepage distances min. 3.6 mm

Insulating material class CTI 600

Overvoltage category III III II

Pollution degree 3 2 2

Rated voltage 250 630 630

Rated test voltage 2.5 6 4

Protection category according to IEC 529 IP20

Tightening torque UL 4.4 lb-in max.

Min. insul. strip length 8 mm

Pole size 2 - 24

Color black

Type 350

Screw type terminal block, pluggable, centerline 5 mm / 0.197 inches, wire entry parallel to plug direction, lift system, contact system with integrated wire protection, strain relief

Technical Data

UL V / A / AWG 300 / 16 / 28 - 12

0.08 - 2.5 mm² 250 V / 4 kV / 12 A

Insulation co-ordination according to EN 60664-1

Clearance and creepage distances min. 3.6 mm

Insulating material class CTI 600

Overvoltage category III III II

Pollution degree 3 2 2

Rated voltage 250 630 630

Rated test voltage 2.5 6 4

Protection category according to IEC 529 IP20

Tightening torque UL 4.4 lb-in max.


Min. insul. strip length 8 mm

Pole size 3 - 12

Color black

Dimensions in mm

1 mm = 0.0394 in.

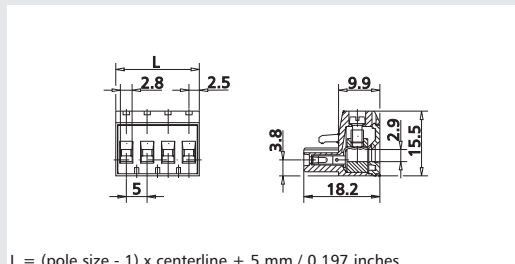

$L = (\text{pole size} - 1) \times \text{centerline} + 5 \text{ mm} / 0.197 \text{ inches}$

Part numbers (P/N)

(information: page 56)

Complete the part number by adding the pole size.

Type 349

centerline 5 mm / 0.197 inches

P/N 313491

	02	03	04	05	06	07	08
09	10	11	12	13	14	15	16
17	18	19	20	21	22	23	24

Type 349

centerline 10 mm / 0.394 inches

P/N 313492


	02	03	04	05	06	07	08
09	10	11	12				

Standard pole sizes

Available on demand. Minimum order quantity 5000 pieces per item.

Dimensions in mm

1 mm = 0.0394 in.

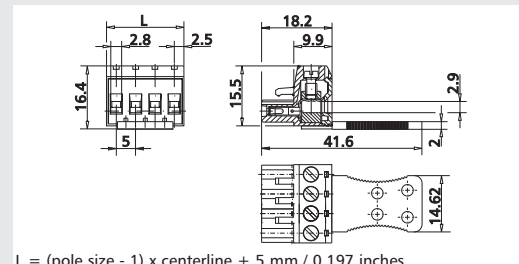

$L = (\text{pole size} - 1) \times \text{centerline} + 5 \text{ mm} / 0.197 \text{ inches}$

Part numbers (P/N)

(information: page 56)

Complete the part number by adding the pole size.

Type 350

centerline 5 mm / 0.197 inches

P/N 313501

	03	04	05	06	07	08
09	10	11	12			

Standard pole sizes

Available on demand. Minimum order quantity 5000 pieces per item.