

Cornell Dubilier

Cornell Dubilier Marketing, Inc
Liberty, South Carolina
TEL: 864-843-2277 FAX:864-843-3800

Engineering

Catalog Number: 101X233U050BB2B

Customer Part Number: None

Date: 12/2/2010

Capacitance: 23000 μ F

Tolerance: - 10% + 75%

Working Volts: 50 VDC

Surge Volts: 75VDC

Leakage Current @ 25°C: 1609 μ A

ESR @ 120 Hz @ 25°C: 0.011 Ω max.

Ripple Current @ 120 Hz, 85°C: 19.7A

Diameter (D): 2.00 \pm 0.031 inches

Length (L): 3.125 \pm 0.062 inches


Total Length, W/Insulation (TL): 3.39 \pm 0.062 inches

Terminal Spacing (S): 0.875 \pm 0.015 inches

Terminal Thread (T): 10-32 UNF

Insulation: PVC

Operating Temperature: - 55°C ~ +105°C

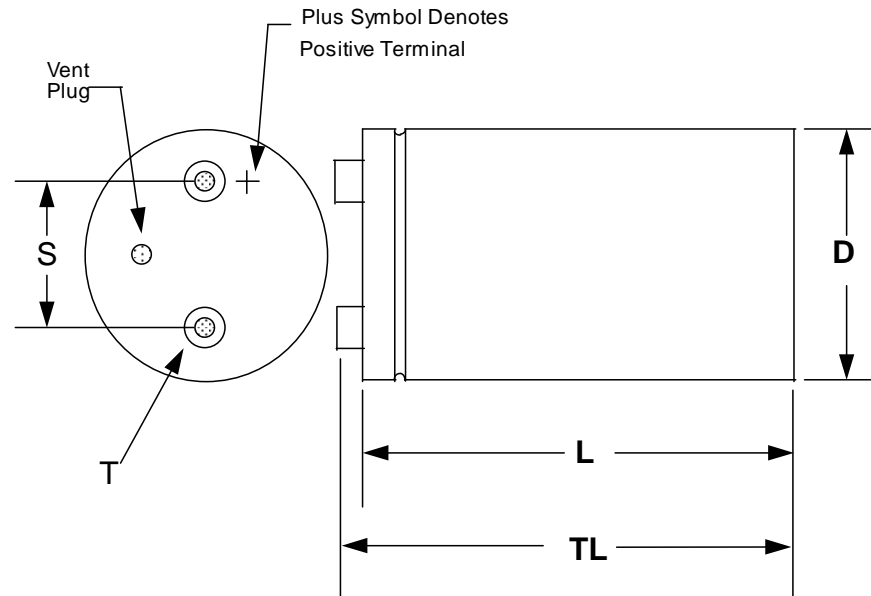

ROHS Compliant for all date codes after "0513",
Per provisions of CD document 10-28.

"Controlled Copy" if viewed on CD Server or if copy is stamped
in Red, Otherwise considered as an "Uncontrolled Copy"